

# Power Driving

- Chrome vanadium alloy steel
- Anti-rust oiled, sand-blasted

## 1/4" & 3/8" & 1/2" Hex size shank driver



### 770

- Bit adapter
- Ball retainer type
- DIN 7428



KT NO.	Size	Overall Length (mm)		
7702-25	1/4"	25	6.0	20 / 200
7702-50	1/4"	50	13.5	10 / 100
<b>new</b> 7702-75	1/4"	75	23.5	10 / 100
7703-50	3/8"	50	23.5	6 / 84

### 771


- Bit adapter
- Pin retainer type
- DIN 7428



KT NO.	Size	Overall Length (mm)		
7712-02	1/4"	50	12.5	10 / 100
7712-03	1/4"	75	33.5	10 / 100
7713-02	3/8"	50	23.0	6 / 84

### 772 **new**


- Bit adapter
- Ball retainer type
- DIN 7428



KT NO.	Size	Overall Length (mm)		
7722-50	1/4"	50	13.5	10 / 100
7723-50	3/8"	50	23.5	6 / 84
7724-50	1/2"	50	33.4	6 / 72

### 774 **new**


- Bit adapter
- Wobble function provides up to 15° accessibility
- Twin gap head fit for most cordless power tools

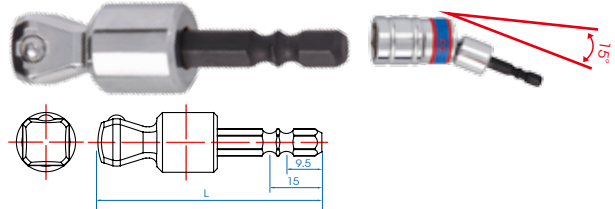

KT NO.	Size	L mm		
7743A-56	3/8"	56	30.0	6 / 72
7744A-60	1/2"	60	42.8	6 / 72

### 775 **new**

- Universal joint socket adapter
- Universal joint function provides up to 30° accessibility
- Twin gap head fit for most cordless power tools

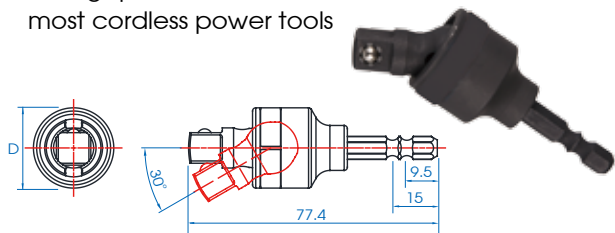

KT NO.	Size	D mm	L mm		
7753A-78	3/8"	25	77.4	90.0	6 / 120
7754A-85	1/2"	29	84.5	127.6	6 / 96