




409616M



1/2" DR. 六角气动起子变换头 16 mm

- 安全固定螺丝设计，可确保批头在高强度使用下依然稳固不脱落
- 可更换式冲击批头适用于 16mm 六角套筒
- 批头固定座与可更换式冲击批头均采用铬钼合金钢制造，具备优异的抗冲击强度，并采用黑色磷化防锈涂层处理
- DIN 3121

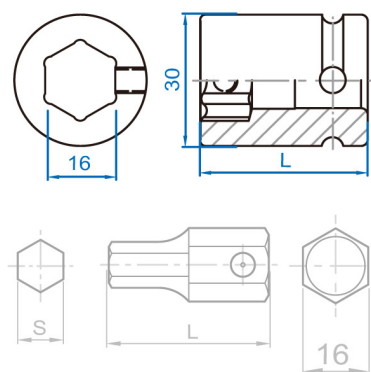

Item	S mm	mm	L (mm)	Max. Torq (Nm)	g	箱 / 包
409616M	-	16	38	680.0	145	10 / 160
174010H	H10	16	40	264.0	46	20 / 400
174012H	H12	16	40	480.0	52	20 / 400
174014H	H14	16	40	684.0	60	20 / 200
174017H	H17	16	40	680.0	73	20 / 200

Item	S mm	 mm	L (mm)	Max. Torq (Nm)	 g	 / 
174019H	H19	16	40	680.0	80	20 / 200
174022H	H22	16	40	680.0	97	12 / 120