





799A



空气过滤器 调压器 润滑器

- 半自动排水阀
- 钢材润滑提供最佳的保护
- 容易安装与拆卸
- 最大输入压力：215 psi
- 最大输出压力：7~150 psi
- 工作温度范围：5~60°C

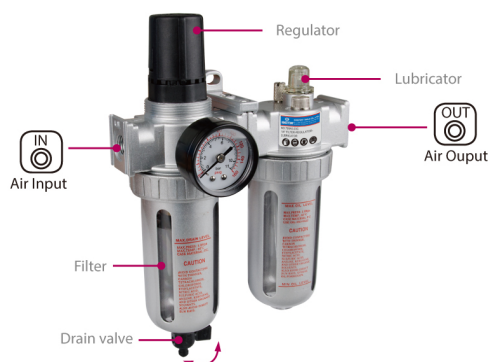

Item	Port Size (inch)	Filter Element (μ)	Max Flow (L/min)	Drain Capacity (ml)	Oil Capacity (ml)	Air inlet inch	Weight (kgs) (lbs)	 / 
799A0-23C	1/4"	5	1750	80 150		1/4" BSPT	1.00 2.20	1 / 12
799A1-23C	1/4"	5	1750	80 150		1/4" NPT	1.00 2.20	1 / 12
799A0-33C	3/8"	5	2500	80 150		3/8" BSPT	1.00 2.20	1 / 12
799A1-33C	3/8"	5	2500	80 150		3/8" NPT	1.00 2.20	1 / 12

Item	Port Size (inch)	Filter Element (μ)	Max Flow (L/min)	Drain Capacity (ml)	Oil Capacity (ml)	Air inlet inch	Weight (kgs) (lbs)	 / 
799A0-43C	1/2"	5	3000	80 150		1/2" BSPT / NPT	1.00 2.20	1 / 12