




609616MxxH



3/4" DR. 气动批头套筒

- 适用于机械设备等重型高强度作业：3/4" 驱动端批头固定座与六角规格可更换式冲击批头
- 安全紧定螺钉设计，可确保批头在高强度使用下依然稳固不脱落
- 可更换式冲击批头适用于 16mm 六角套筒
- 批头固定座与可更换式冲击批头皆采用铬钼合金钢制造，具备优异的抗冲击强度，并采黑磷酸盐防锈涂层处理
- DIN 3121

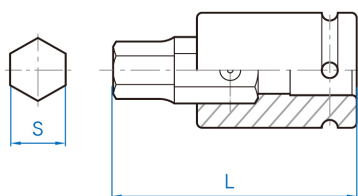

1740



609616M



1954



609622M

Item	S (mm)	mm	L (mm)	Max. Torq (Nm)		
609616M22H	H22	16	77	880	473	4 / 40
609616M10H	H10	16	77	264	416	4 / 40
609616M12H	H12	16	77	480	422	4 / 40
609616M14H	H14	16	77	684	430	4 / 40
609616M17H	H17	16	77	880	443	4 / 40

Item	 S (mm)	 mm	L (mm)	Max. Torq (Nm)	 g	 / 
609616M19H	H19	16	77	880	450	4 / 40