




## 609622MxxH



### 3/4" DR. 气动批头套筒

- 适用于机械设备等重型高强度作业：3/4" 驱动端批头固定座与六角规格可更换式冲击批头
- 安全紧定螺钉设计，可确保批头在高强度使用下依然稳固不脱落
- 可更换式冲击批头适用于 22mm 六角套筒
- 批头固定座与可更换式冲击批头皆采用铬钼合金钢制造，具备优异的抗冲击强度，并采黑磷酸盐防锈涂层处理
- DIN 3121

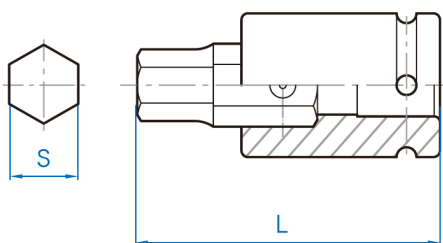

| Item       |  S<br>(mm) |  mm | L<br>(mm) | Max. Torq<br>(Nm) |  |  |
|------------|-----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-----------|-------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 609622M19H | H19                                                                                           | 22                                                                                     | 93        | 1577              | 670                                                                                   | 1 / 24                                                                                |
| 609622M22H | H22                                                                                           | 22                                                                                     | 93        | 2436              | 692                                                                                   | 1 / 24                                                                                |
| 609622M24H | H24                                                                                           | 22                                                                                     | 93        | 2436              | 706                                                                                   | 1 / 24                                                                                |
| 609622M27H | H27                                                                                           | 22                                                                                     | 93        | 2436              | 730                                                                                   | 1 / 24                                                                                |
| 609622M30H | H30                                                                                           | 22                                                                                     | 93        | 2436              | 744                                                                                   | 1 / 24                                                                                |

| Item       |  S<br>(mm) |  mm | L<br>(mm) | Max. Torq<br>(Nm) |  g |  /  |
|------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|-------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 609622M32H | H32                                                                                        | 22                                                                                  | 93        | 2436              | 783                                                                                  | 1 / 24                                                                                                                                                                  |