




4330SR



Dado de 12 Puntos Estándar en Pulgadas de 1/2" DR.

- Dado de 12 pt. estriados
- Acero de aleación al cromo vanadio
- pulido, cromado
- Ranuras de retención de 4 rulemanes
- ANSI/ASME B107.1

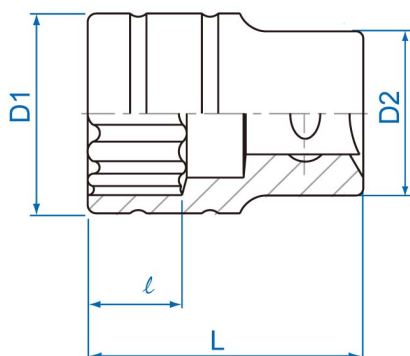

Item	inch	D1 mm	D2 mm	ℓ mm	L (mm)	g	
433010SR	5/16	13.2	21.8	7.0	38	41	10 / 200
433012SR	3/8	15.0	21.8	7.0	38	44	10 / 200
433013SR	13/32	15.0	23.3	7.0	38	51	10 / 200
433014SR	7/16	16.4	23.3	8.0	38	53	10 / 200
433015SR	15/32	18.0	23.3	8.0	38	55	10 / 200
433016SR	1/2	19.0	23.3	10.0	38	57	10 / 200

Item	 inch	D1 mm	D2 mm	 mm	L (mm)	 g	
433018SR	9/16	20.4	23.3	11.0	38	59	10 / 200
433019SR	19/32	21.6	23.3	11.0	38	60	10 / 200
433020SR	5/8	22.5	23.3	11.0	38	62	10 / 200
433022SR	11/16	24.0	23.2	12.0	38	60	10 / 200
433024SR	3/4	27.0	23.2	13.0	38	73	10 / 160
433025SR	25/32	28.0	23.2	14.0	38	75	10 / 160
433026SR	13/16	28.6	23.2	14.0	38	79	10 / 160
433028SR	7/8	30.2	24.0	14.0	40	87	10 / 160
433030SR	15/16	32.6	26.0	16.0	42	105	8 / 160
433032SR	1	34.8	26.8	16.0	42	119	8 / 160
433034SR	1-1/16	36.6	28.0	17.0	42	133	6 / 120
433036SR	1-1/8	39.0	30.0	17.0	44	158	6 / 120
433038SR	1-3/16	40.0	29.5	18.0	44	156	6 / 120
433040SR	1-1/4	42.5	30.0	18.0	44	173	6 / 120
433044SR	1-3/8	46.0	33.0	24.0	46	243	6 / 96