




6330M



Dado de 12 Puntos Estándar Métrico de 3/4" DR.

- Juego de dados de 12 pt. estriados
- Acero de aleación al cromo vanadio, pulido, cromado
- Ranuras de retención de 4 rulemanes
- DIN 3124, ISO 2725-1

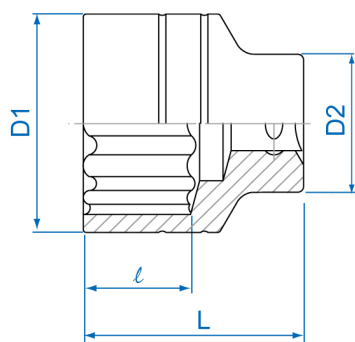

Item	mm	D1 mm	D2 mm	l mm	L (mm)	g	
633017M	17	26.0	32.7	14	51	144	8 / 96
633019M	19	30.0	32.7	14	51	164	8 / 96
633021M	21	32.0	32.7	16	51	169	8 / 96
633022M	22	33.0	35.7	16	51	204	8 / 96
633023M	23	34.0	35.7	16	51	210	8 / 96
633024M	24	35.0	35.7	17	51	209	8 / 96

Item	 mm	D1 mm	D2 mm	 mm	L (mm)		
633026M	26	35.7	35.0	17	52	196	8 / 96
633027M	27	38.0	36.0	19	52	219	8 / 96
633028M	28	39.0	36.0	19	52	220	8 / 96
633029M	29	40.0	38.0	19	52	245	8 / 96
633030M	30	42.0	38.0	21	54	274	6 / 48
633032M	32	44.0	38.0	23	56	297	6 / 48
633033M	33	46.0	39.0	23	56	330	6 / 48
633034M	34	47.0	42.0	24	57	377	6 / 48
633035M	35	48.0	42.0	25	58	393	6 / 36
633036M	36	50.0	42.0	25	58	420	6 / 36
633038M	38	52.0	45.0	27	60	468	6 / 36
633041M	41	56.0	45.0	29	64	549	4 / 32
633042M	42	57.0	45.0	29	64	541	4 / 32
633046M	46	62.0	48.0	33	68	673	4 / 32
633048M	48	64.0	48.0	34	70	689	2 / 24
633050M	50	68.0	48.0	34	72	840	2 / 24
633054M	54	72.0	50.0	35	75	943	1 / 20
633055M	55	74.0	50.0	37	76	989	1 / 20
633058M	58	77.0	50.0	37	78	1044	1 / 20
633060M	60	80.0	50.0	40	78	1072	1 / 20
633063M	63	83.0	55.0	40	81	1201	1 / 12

Item	 mm	D1 mm	D2 mm	 mm	L (mm)	 g	 / 
633065M	65	85.0	58.0	43	83	1311	1 / 12
633070M	70	92.0	58.0	46	88	1634	1 / 12