

9TY112

Bottle Jack

- Precise welded and leakproof construction
- Safety valve prevent the ram from being overextended and causing damage to the cylinder
- Arc surface bottom of the steel base to make the load in the center of the piston
- Prevent rust with ENP (electroless nikel plating) ram piston, make it smooth, bright, and long life
- Double seals in the pump to prevent the oil leak
- Longer life than normal screw connection jack due to smooth bearing surfaces and dose tolerances

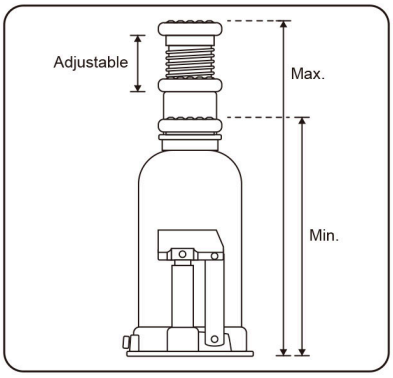



below 10 Ton | 12 ~20 Ton | above 32 Ton

Item	Capacity (Ton)	Adjustable height (min)	Min Height (mm)	Max Height (mm)	N.W. (Kg)	Cuft
9TY112-02A-B	2	48	175	339	2.38	0.6

Item	Capacity (Ton)	Adjustable height (min)	Min Height (mm)	Max Height (mm)	N.W. (Kg)	Cuft
9TY112-03A-B	3	60	190	368	2.5	0.77
9TY112-04A-B	4	60	190	368	2.5	0.77
9TY112-05A-B	5	70	210	407	4.02	0.64
9TY112-06A-B	6	70	210	407	4.02	0.64
9TY112-08A-B	8	80	225	440	5.4	0.74
9TY112-10A-B	10	80	225	440	5.4	0.74
9TY112-12A-B	12	80	230	465	6.69	0.64
9TY112-15A-B	15	80	230	460	7.9	0.64
9TY112-16A-B	16	80	230	460	7.9	0.49
9TY112-20A-B	20	60	240	450	10.06	0.57
9TY112-32A-B	32	-	260	430	17.8	0.35
9TY112-50A-B	50	-	280	470	25.8	0.49