

9TY112A

Bottle Jack with Blow Case

- Precise welded and leakproof construction
- Safety valve prevent the ram from being overextended and causing damage to the cylinder
- Arc surface bottom of the steel base to make the load in the center of the piston
- Prevent rust with ENP (electroless nikel plating) ram piston, make it smooth, bright, and long life
- Double seals in the pump to prevent the oil leak
- Longer life than normal screw connection jack due to smooth bearing surfaces and dose tolerances
- Come with blow case to protect product

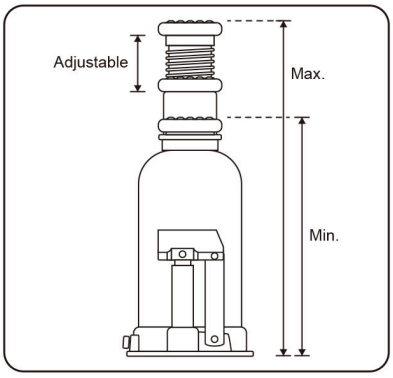

Item	Capacity (Ton)	Adjustable height (min)	Min Height (mm)	Max Height (mm)	N.W. (Kg)	Cuft
9TY112-035A-B	3.5	88	172	372	3.79	0.72

Item	Capacity (Ton)	Adjustable height (min)	Min Height (mm)	Max Height (mm)	N.W. (Kg)	Cuft
9TY112-05A-B	5	110	218	474	4.89	0.95
9TY112-10A-B	10	115	220	488	7.37	1.06
9TY112-15A-B	15	113	228	508	9.87	1.26
9TY112-20A-B	20	110	241	525	13.07	1.31