




409616M



1/2" DR. 六角氣動起子變換頭 16 mm

- 安全固定螺絲設計，可確保起子頭在高強度使用下依然穩固不脫落
- 可更換式衝擊起子頭適用於 16mm 六角套筒
- 起子頭固定座與可更換式衝擊起子頭皆採用鉻鉬合金鋼製造，具備優異的抗衝擊強度，並採黑磷酸鹽防鏽塗層處理
- DIN 3121

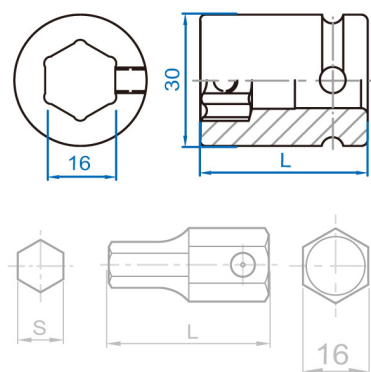

Item	S mm	mm	L (mm)	Max. Torq (Nm)		
409616M	-	16	38	680.0	145	10 / 160
174010H	H10	16	40	264.0	46	20 / 400
174012H	H12	16	40	480.0	52	20 / 400
174014H	H14	16	40	684.0	60	20 / 200
174017H	H17	16	40	680.0	73	20 / 200

Item	S mm	 mm	L (mm)	Max. Torq (Nm)	 g	 / 
174019H	H19	16	40	680.0	80	20 / 200
174022H	H22	16	40	680.0	97	12 / 120