





809622MxxH



3/4" DR. 氣動起子頭套筒

- 適用於機械設備等重型高強度作業：1" 驅動端起子頭固定座與六角規格可更換式衝擊起子頭
- 安全固定螺絲設計，可確保起子頭在高強度使用下依然穩固不脫落。
- 可更換式衝擊起子頭適用於 22mm 六角套筒
- 起子頭固定座與可更換式衝擊起子頭皆採用鉻鋁合金鋼製造，具備優異的抗衝擊強度，並採黑磷酸鹽防鏽塗層處理
- DIN 3121

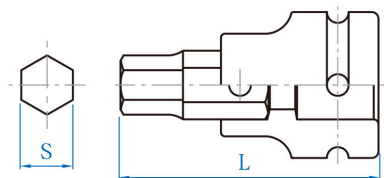

Item	S (mm)	mm	L (mm)	Max. Torq (Nm)	g	Box / Carton
809622M19H	H19	22	93	1577	896	1 / 10
809622M22H	H22	22	93	2436	918	1 / 10
809622M24H	H24	22	93	2436	932	1 / 10
809622M27H	H27	22	93	2436	956	1 / 10
809622M30H	H30	22	93	2436	988	1 / 10

Item	 S (mm)	 mm	L (mm)	Max. Torq (Nm)	 g	 / 
809622M32H	H32	22	93	2436	999	1 / 10