




9TYP8512AA-B

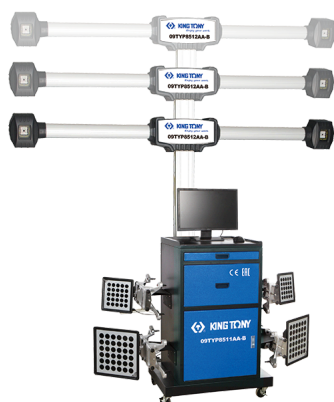


輪胎定位機(感應器自動升降)

- 透過精確校對，客戶可直接操作輪胎定位
- 使用3D圖像採集測量技術，讓工作快速與準確
- 光線和溫度不會影響到測量結果
- 相機可自動跟蹤四個目標板，讓工作更快速與方便



- Use two precise cameras to measure the wheel angle



- There are rubber pads on the turntable to make sure the tires are in a stable plane



- The special clamp will prevent the deviation between rim and clamp



- There is no electronic components and sensors on the target board

Appellation	Measuring Range	Accuracy
Display accuracy	-	1' / 0.01° / 0.1mm
Camber	±10°	±2°
Caster	±20°	±4°
King-pin(SAL)	±20°	±2°
Toe	±20°	±2°
Set back	±5°	±2°
Thrust angle	±5°	±2°
Track width	1800mm	±2mm
Wheel base	3300mm	±2mm

Item	N.W. (Kg)	G.W. (kg)	Cuft
9TYP8512AA-B	177	204.7	1# 22.95 2# 4.59 3# 18.71