




609616MxxH



3/4" DR. 氣動起子頭套筒

- 適用於機械設備等重型高強度作業：3/4" 驅動端起子頭固定座與六角規格可更換式衝擊起子頭
- 安全固定螺絲設計，可確保起子頭在高強度使用下依然穩固不脫落。
- 可更換式衝擊起子頭適用於 16mm 六角套筒
- 起子頭固定座與可更換式衝擊起子頭皆採用鉻鉬合金鋼製造，具備優異的抗衝擊強度，並採黑磷酸鹽防鏽塗層處理
- DIN 3121

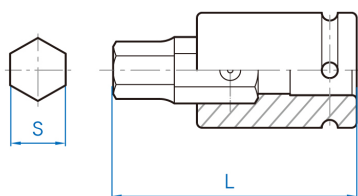

1740



609616M



1954



609622M

Item	S (mm)	mm	L (mm)	Max. Torq (Nm)		
609616M22H	H22	16	77	880	473	4 / 40
609616M10H	H10	16	77	264	416	4 / 40
609616M12H	H12	16	77	480	422	4 / 40
609616M14H	H14	16	77	684	430	4 / 40
609616M17H	H17	16	77	880	443	4 / 40

Item	 S (mm)	 mm	L (mm)	Max. Torq (Nm)	 g	 / 
609616M19H	H19	16	77	880	450	4 / 40