



NO.87419-5B


Enjoy your work




Loading Capacity

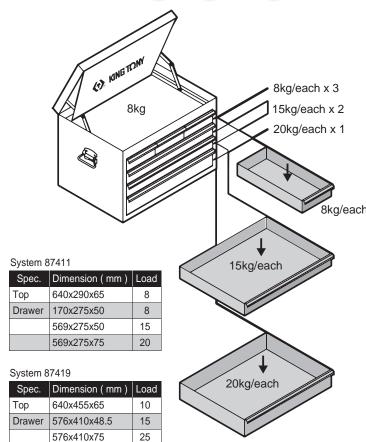









customer service e-mail : service@kingtony.com

- Please read these instructions carefully
- Boxes that have no front locking panel are equipped with a locking a mechanism
- actuated by the lid.
- When the lid is closed, tabs in the lock bar engage the pockets on the drawers. When
- the lid is open,
- the tabs are raised clear of pockets.
- Important: The drawers must be fully closed before the lid is shut.
- DO NOT slam the drawers when the lid is shut; they will not lock and damage to lock
- bar tabs or
- lock pockets may occur.
- Should this happen, remove the drawer and straighten out the deformed tab with a
- For the lock pockets, a pair of pliers should be used. See (1A) lock bar tab and (1B)
- lock pocket.

Removal/Re-installation of Drawers:

- To remove, pull drawer fully open. Push in the plastic level (2) on
 - to release drawer from slides.

Pull the drawer out.

• To re-install, line up the drawer slides, engage, and close the drawer completely.

- To ensure smooth operation of the slides, lubricate them periodically with
- a light grease or pertroleum jelly.
- Do this at least twice a year or more, depending on the frequency of use.