

Impact Accessory


- Material - chrome molybdenum alloy steel
- Finishing - phosphate sunk

90401 90402 1/2"

- Locking ring
- High tensile rubber material

90601 90602 1/2"

- Locking pin
- Chrome vanadium steel
- DIN 3129

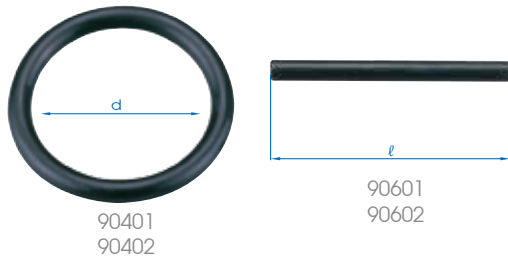

KT NO.	Desp.	Ø	d / l	Applied to socket sizes
90401	ring	3.5	19	4535M (8~14mm) 4535S (15/16"~9/16")
				4435M (8~14mm) 4435S (15/16"~9/16")
				4015M (5~14mm) 4015S (1/4"~1/2")
				4055M (4~14mm) 4055S (3/16"~1/2")
				4935M (10~14mm) 4935S (7/16"~9/16")
				4415M (17mm) 4575 (E10~E18)
				4835M (10~17mm)
				4530M (8~14mm)
90601	pin	3.0	20	414A08S, 4053, 4063, 4065, 4075, 4873, 4015 4147, 4055, 4056
90402	ring	3.5	23	4535M (15~46mm) 4535S (11/16"~1-1/4")
				4435M (15~46mm) 4435S (5/8"~1-1/4")
				4935M (16~30mm) 4935S (11/16"~1-1/4")
				4015M (17, 19mm)
				4415M (19, 21mm)
				4530M (15~36mm)
				4575M (E20)
				4835M (19~30mm)
90602	pin	3.0	25	4260, 4796, 4797, 4863, 4873, 4866

Impact Socket Rail Set

4423MP 1/2"

- Thin wall version



Contents		Kg	4.5	48
○	4835M	17, 19, 21		

7411PP 1/2"

11
PC.



Contents		Kg	7.63	4 / 32
☆	3575M	E5, E6, E7, E8		
☆	4575M	E10, E12, E14, E16, E18, E20		
	4863	1/2" F x 3/8" M		

Impact Socket Set

- Material - chrome molybdenum alloy steel
- Finishing - phosphate sunk

4408MP 1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)

8
PC.



Contents		Kg	1.3	1 / 20
○	4535M	10, 12, 13, 14, 17, 19, 21, 24		

4408SP 1/2"

Metal case size (mm) :
270 x 73 x 46 (0.032 cuft)

8
PC.



Contents		Kg	1.3	1 / 20
○	4535S	3/8, 7/16, 1/2, 9/16, 11/16, 3/4, 13/16, 15/16		