


Standard Impact Socket

- Material - chrome molybdenum alloy steel
- Finishing - phosphate sunk

6535M

3/4"

• DIN 3121

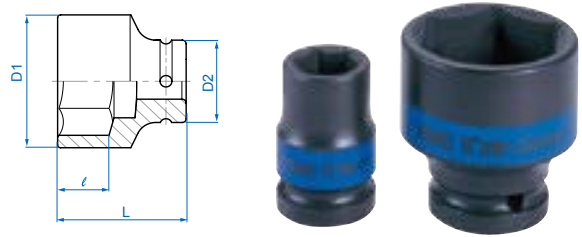

KT NO.	Ø mm	D1 mm	D2 mm	l mm	L mm	⚖️	📦
653517M	17	29.0	44	10	50	316	6 / 48
653518M	18	30.0	44	10	50	324	6 / 48
653519M	19	32.0	44	10	50	329	6 / 48
653521M	21	35.0	44	13	50	341	6 / 48
653522M	22	36.0	44	13	50	346	6 / 48
653523M	23	37.0	44	15	50	350	6 / 48
653524M	24	38.0	44	15	50	352	6 / 48
653526M	26	40.0	44	15	53	358	6 / 48
653527M	27	42.0	44	18	53	380	6 / 48
653528M	28	44.0	44	18	53	394	6 / 48
653529M	29	45.0	44	18	53	404	6 / 48
653530M	30	46.0	44	20	53	412	6 / 48
653532M	32	48.0	44	20	57	460	6 / 36
653533M	33	50.0	44	20	57	479	6 / 36
653534M	34	51.0	44	22	57	491	6 / 36
653535M	35	52.0	44	22	57	497	6 / 36
653536M	36	53.0	44	22	57	519	6 / 36

KT NO.	Ø mm	D1 mm	D2 mm	l mm	L mm	⚖️	📦
653538M	38	56.0	44	22	57	540	4 / 32
653540M	40	58.0	44	22	58	567	4 / 32
653541M	41	59.0	44	24	58	580	4 / 32
653542M	42	61.0	44	24	58	616	2 / 24
653543M	43	62.0	44	24	58	636	2 / 24
653544M	44	64.0	44	24	62	676	2 / 24
653546M	46	66.0	44	24	62	717	2 / 24
653548M	48	68.0	44	26	65	925	2 / 24
653550M	50	71.0	44	26	65	955	1 / 20
653552M	52	74.0	54	30	68	1085	1 / 20
653554M	54	76.0	54	30	68	1125	1 / 20
653555M	55	77.0	54	30	70	1160	1 / 20
653557M	57	79.0	54	32	70	1198	1 / 20
653558M	58	81.0	54	32	70	1226	1 / 20
653560M	60	84.0	54	32	70	1313	1 / 20
653563M	63	84.5	54	40	80	1341	1 / 12
653565M	65	86.5	54	43	80	1358	1 / 12

6535S

3/4"

• ANSI/ASME B107.2



KT NO.	Ø inch	D1 mm	D2 mm	l mm	L mm	⚖️	📦
653522S	11/16	29	38	10	50	225	8 / 96
653524S	3/4	32	38	10	50	238	8 / 96
653526S	13/16	35	38	13	50	252	8 / 96
653528S	7/8	36	38	13	50	257	8 / 96
653530S	15/16	37	38	15	50	288	8 / 96
653532S	1	38	38	15	53	320	8 / 96
653534S	1-1/16	42	40	18	53	325	6 / 48
653536S	1-1/8	44.7	40	18	53	355	6 / 48
653538S	1-3/16	46	40	20	53	365	6 / 48
653540S	1-1/4	48	44	20	57	460	6 / 36
653542S	1-5/16	50	44	20	57	479	6 / 36
653544S	1-3/8	52	44	22	57	497	6 / 36
653546S	1-7/16	54	44	22	57	529	6 / 36
653548S	1-1/2	56	44	22	57	540	4 / 32

KT NO.	Ø inch	D1 mm	D2 mm	l mm	L mm	⚖️	📦
653550S	1-9/16	58	44	22	58	567	4 / 32
653552S	1-5/8	59	44	24	58	580	4 / 32
653554S	1-11/16	63.5	44	25	58	636	2 / 24
653556S	1-3/4	64	44	25	62	676	2 / 24
653558S	1-13/16	66	44	25.5	62	717	2 / 24
653560S	1-7/8	68	44	27	65	925	2 / 24
653562S	1-15/16	70	44	27	65	955	1 / 20
653564S	2	72	54	28	68	1035	1 / 20
653566S	2-1/16	74	54	30	68	1078	1 / 20
653568S	2-1/8	76	54	30	68	1122	1 / 20
653570S	2-3/16	77	54	30.5	70	1151	1 / 20
653572S	2-1/4	79	54	32.5	70	1208	1 / 20
653574S	2-5/16	81	54	32.5	70	1245	1 / 20
653576S	2-3/8	84	54	33.5	70	1349	1 / 20