

Complete Set for Assembly and Disassembly of Self Adjusting Clutch

9AK21

- Allows operations on clutch equipped with this device in order to prevent any damage to system and to keep adapter ring in right position
- Necessary for pre-tensioning self adjusting clutches before removal or installation avoiding clutch deformation
- Prevents plate distortion which may prevent the clutch from disengaging or cause dragging
- Features a refitting tool, allowing the clutch adjuster to be wound back, and six alignment adaptors. Alignment of clutch disk to drive bearing or to disk pushing plate
- Suitable for most SAC(Self Adjusting Clutches 3 and 4 holes) equipped on vehicles of FIAT GROUP, VW-AUDI, BMW, MERCEDES, VOLVO, OPEL, RENAULT etc

10.75 1 / 2

38
PC.





Pulley Removing Wrench

9AL

- To lock the pulley during removing or assembling any type of pulley retaining bolt


KT NO.	L Inch	mm	Ø mm	Kg	1 / 2
9AL11	14-3/8	365	40~140	540.0	12 / 36
9AL12	14-3/8	365	40~140	540.0	12 / 36

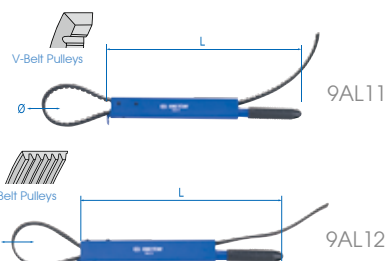

• Compressors



• Water pump pulley



• Alternator pump pulley



• Oil filter removing & assembling

Universal Cooling Pump and Refiller Tool Set

9AM01

- Quickly and easily for testing leakage in radiator system
- Vacuum leakage testing and bubble-free refilling
- Special pick hooks to speed up replacement of pipes
- Quick-release coupling on each connections
- Rubber cones with functional diameter 17~40mm

KT NO.	Type	Kg	1 / 2
9AM010	Japan	2.68	1 / 4
9AM011	USA	2.68	1 / 4
9AM012	Europe	2.68	1 / 4



DO NOT open the radiator cap on a hot engine



7
PC.

