

Bit Socket

- Socket made by chrome vanadium alloy steel
- Bit made by silicon alloy steel (S2)
- Polished, chrome plated

KT No. & D1






In order to get normal life of bit socket, Always use within limited torque to bit.

3025 3/8"

- Hexagon head
- DIN 7422/3120






| KT NO. |  mm | Overall length mm |  |  |
|--------|--|-------------------|---|---|
| 302503 | H3 | 50 | 28 | 20 / 400 |
| 302504 | H4 | 50 | 30 | 20 / 400 |
| 302505 | H5 | 50 | 34 | 20 / 400 |
| 302506 | H6 | 50 | 38 | 20 / 400 |
| 302507 | H7 | 50 | 38 | 20 / 400 |
| 302508 | H8 | 50 | 40 | 20 / 400 |
| 302509 | H9 | 50 | 40 | 20 / 400 |
| 302510 | H10 | 50 | 40 | 20 / 400 |
| 302512 | H12 | 50 | 42 | 20 / 400 |

3023 3/8"

- For torx internal screw
- DIN 3120






| KT NO. |  mm | Overall length mm |  |  |
|--------|--|-------------------|---|---|
| 302308 | T8 | 50 | 28 | 20 / 400 |
| 302309 | T9 | 50 | 28 | 20 / 400 |
| 302310 | T10 | 50 | 28 | 20 / 400 |
| 302315 | T15 | 50 | 28 | 20 / 400 |
| 302320 | T20 | 50 | 30 | 20 / 400 |
| 302325 | T25 | 50 | 34 | 20 / 400 |
| 302327 | T27 | 50 | 38 | 20 / 400 |
| 302330 | T30 | 50 | 38 | 20 / 400 |
| 302340 | T40 | 50 | 40 | 20 / 400 |
| 302345 | T45 | 50 | 40 | 20 / 400 |
| 302350 | T50 | 50 | 42 | 20 / 400 |

3027 3/8"

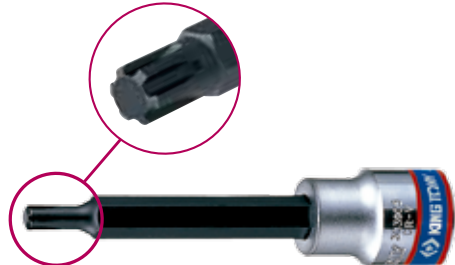
- For tamper resistant torx screw
- DIN 3120






| KT NO. |  mm | Overall length mm |  |  |
|--------|--|-------------------|---|---|
| 302708 | T8H | 50 | 28 | 20 / 400 |
| 302709 | T9H | 50 | 28 | 20 / 400 |
| 302710 | T10H | 50 | 28 | 20 / 400 |
| 302715 | T15H | 50 | 28 | 20 / 400 |
| 302720 | T20H | 50 | 30 | 20 / 400 |
| 302725 | T25H | 50 | 34 | 20 / 400 |
| 302727 | T27H | 50 | 38 | 20 / 400 |
| 302730 | T30H | 50 | 38 | 20 / 400 |
| 302740 | T40H | 50 | 40 | 20 / 400 |
| 302745 | T45H | 50 | 40 | 20 / 400 |
| 302750 | T50H | 50 | 42 | 20 / 400 |

3039 3/8"

- Ribbe bit socket
- Use for VW, Audi, Fiat cylinder head bolt
- DIN 3120






| KT NO. |  size | Overall length mm |  |  |
|--------|--|-------------------|---|---|
| 303904 | M4 | 90 | 68 | 8 / 160 |
| 303905 | M5 | 90 | 69 | 8 / 160 |
| 303906 | M6 | 90 | 71 | 8 / 160 |
| 303907 | M7 | 90 | 72 | 8 / 160 |
| 303908 | M8 | 90 | 88 | 8 / 160 |
| 303909 | M9 | 90 | 89 | 8 / 160 |
| 303910 | M10 | 90 | 90 | 8 / 160 |

302D 3/8"

- For torx plus tamper screw
- IPR20 for the operation of the screwed connection of the plug-in pump on MERCEDES-BENZ Atego and Actros MAZDA 3 1.4 and 1.6
- IPR25 for the screwed connections at the control unit and the air flow sensor on VW
- DIN 3120



| KT NO. |  mm | Overall length mm |  |  |
|--------|--|-------------------|---|---|
| 302D08 | IPR8 | 50 | 33.2 | 20 / 400 |
| 302D09 | IPR9 | 50 | 33.2 | 20 / 400 |
| 302D10 | IPR10 | 50 | 34.0 | 20 / 400 |
| 302D15 | IPR15 | 50 | 34.0 | 20 / 400 |
| 302D20 | IPR20 | 50 | 34.0 | 20 / 400 |
| 302D25 | IPR25 | 50 | 34.0 | 20 / 400 |
| 302D27 | IPR27 | 50 | 34.0 | 20 / 400 |
| 302D30 | IPR30 | 50 | 34.8 | 20 / 400 |
| 302D40 | IPR40 | 50 | 38.8 | 20 / 400 |
| 302D45 | IPR45 | 50 | 38.8 | 20 / 400 |
| 302D50 | IPR50 | 50 | 40.0 | 20 / 400 |
| 302D55 | IPR55 | 50 | 47.4 | 15 / 300 |
| 302D60 | IPR60 | 50 | 51.2 | 12 / 240 |