

# Spark Plug Socket

- Chrome vanadium alloy steel
- Polished, chrome plated
- 4 ball retaining grooves




KT No. & D1

## 4630

- 6 / 12 points
- Size combined
  - 16.0mm (5/8")
  - 20.8mm (13/16")
- Inside sleeve
  - rubber
  - magnet
- DIN 3120
- 14mm use for Toyota Yaris, Vios



Magnet

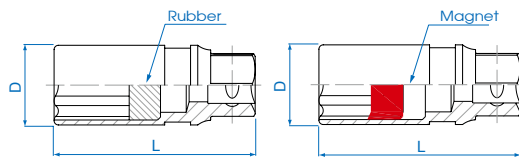

## 4635

463014RC - Thin walled design



463016R - Thin walled design



463516R - Thin walled design

## 4665 1/2"

463514RC - Thin walled design



466016 - Thin walled design



466516 - Thin walled design

KT NO.	Type	Size		D mm	L mm	Weight (g)	Volume (cc)
		Inch	mm				
463014RC	12 points Rubber	-	14.0	19.05	70	70	12 / 240
463016R	12 points Rubber	5/8	16.0	20.75	70	110	10 / 200
466016	12 points Magnet	5/8	16.0	20.75	70	115	10 / 200
463514RC	6 points Rubber	-	14.0	19.05	70	70	12 / 240
463516R	6 points Rubber	5/8	16.0	20.75	70	110	10 / 200
466516	6 points Magnet	5/8	16.0	20.75	70	115	10 / 200
463021R	12 points Rubber	13/16	20.8	27.7	70	160	12 / 120
466021	12 points Magnet	13/16	20.8	27.7	70	165	12 / 120
463521R	6 points Rubber	13/16	20.8	27.7	70	155	12 / 120
466521	6 points Magnet	13/16	20.8	27.7	70	160	12 / 120



463021R



466021



463521R




466521

# Ribe Socket M10S

## 9AW4911 1/2"

- Used for replacing and removing idler pulley center screw on TOYOTA ALTIS

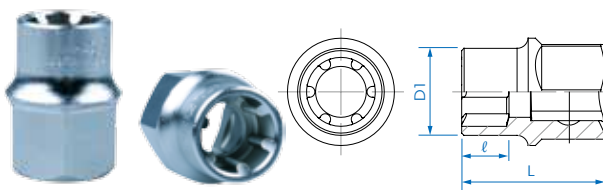

KT NO.	D1 mm	ℓ mm	L mm	Weight (g)	Volume (cc)
9AW4911	19	10	33.8	16	10 / 200

# Ribe Socket M12S

## 9AW4901 1/2"

- Used for replacing and removing engine head screw and flywheel center screw on NISSAN models



KT NO.	D1 mm	ℓ mm	L mm	Weight (g)	Volume (cc)
9AW4901	22	14	38	72.0	10 / 200