


# Standard Socket

- Chrome vanadium alloy steel
- Polished, chrome plated
- 4 ball retaining grooves




## 6330M 3/4"

• DIN 3124, ISO 2725-1



## 6330S 3/4"

• ANSI/ASME B107.1

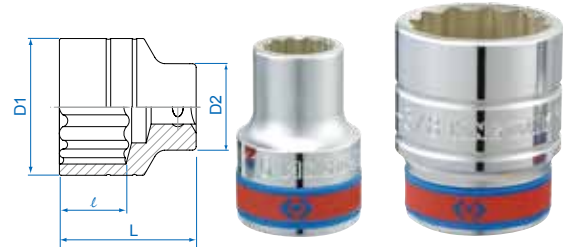

KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg	1/20
633017M	17	26.0	32.7	14	51	187	8 / 96	
633019M	19	30.0	32.7	14	51	207	8 / 96	
633021M	21	32.0	32.7	16	51	210	8 / 96	
633022M	22	33.0	35.7	16	51	209	8 / 96	
633023M	23	34.0	35.7	16	51	216	8 / 96	
633024M	24	35.0	35.7	17	51	219	8 / 96	
633026M	26	35.7	35.0	17	52	243	8 / 96	
633027M	27	38.0	36.0	19	52	238	8 / 96	
633028M	28	39.0	36.0	19	52	233	8 / 96	
633029M	29	40.0	38.0	19	52	261	8 / 96	
633030M	30	42.0	38.0	21	54	295	6 / 48	
633032M	32	44.0	38.0	23	56	317	6 / 48	
633033M	33	46.0	39.0	23	56	351	6 / 48	
633034M	34	47.0	42.0	24	57	400	6 / 48	
633035M	35	48.0	42.0	25	58	406	6 / 36	
633036M	36	50.0	42.0	25	58	434	6 / 36	
633038M	38	52.0	45.0	27	60	497	6 / 36	
633041M	41	56.0	45.0	29	64	581	4 / 32	
633042M	42	57.0	45.0	29	64	591	4 / 32	
633046M	46	62.0	48.0	33	68	724	4 / 32	
633048M	48	64.0	48.0	34	70	775	2 / 24	
633050M	50	68.0	48.0	34	72	889	2 / 24	
633054M	54	72.0	50.0	35	75	1070	1 / 20	
633055M	55	74.0	50.0	37	76	1115	1 / 20	
633058M	58	77.0	50.0	37	78	905	1 / 20	
633060M	60	80.0	50.0	40	78	1250	1 / 20	
633063M	63	83.0	55.0	40	81	1445	1 / 12	
633065M	65	85.0	58.0	43	83	1565	1 / 12	
633070M	70	92.0	58.0	46	88	1875	1 / 12	

KT NO.	inch	D1 mm	D2 mm	l mm	L mm	g	kg	1/20
633022S	11/16	26	35.7	14	50.8	195	8 / 96	
633024S	3/4	30	35.7	14	50.8	225	8 / 96	
633026S	13/16	32	35.7	16	50.8	228	8 / 96	
633028S	7/8	33	35.7	16	51.0	230	8 / 96	
633030S	15/16	35	35.7	17	51.0	240	8 / 96	
633032S	1	35	35.7	17	52.0	242	8 / 96	
633034S	1-1/16	38	36.0	19	52.0	238	8 / 96	
633036S	1-1/8	40	38.0	19	52.0	261	8 / 96	
633038S	1-3/16	42	38.0	21	54.0	295	6 / 48	
633040S	1-1/4	44	38.0	23	56.0	317	6 / 48	
633042S	1-5/16	46	39.0	23	56.0	351	6 / 48	
633044S	1-3/8	48	42.0	25	58.0	406	6 / 36	
633046S	1-7/16	50	42.0	25	58.0	434	6 / 36	
633048S	1-1/2	52	45.0	27	60.0	497	6 / 36	
633050S	1-9/16	54	45.0	28	62.0	537	4 / 32	
633052S	1-5/8	56	45.0	29	64.0	581	4 / 32	
633054S	1-11/16	58	45.0	29	65.0	591	4 / 32	
633056S	1-3/4	60	48.0	31	66.0	657	4 / 32	
633058S	1-13/16	62	48.0	34	68.0	724	4 / 32	
633060S	1-7/8	64	48.0	34	70.0	775	2 / 24	
633062S	1-15/16	66	48.0	34	70.0	832	2 / 24	
633064S	2	68	48.0	34	72.0	889	2 / 24	
633066S	2-1/16	70	50.0	35	74.0	950	1 / 20	
633068S	2-1/8	72	50.0	35	75.0	1020	1 / 20	
633070S	2-3/16	74	50.0	37	76.0	1120	1 / 20	
633072S	2-1/4	76	50.0	37	76.0	1120	1 / 20	
633074S	2-5/16	78	50.0	37	78.0	1160	1 / 20	
633076S	2-3/8	80	50.0	40	78.0	1240	1 / 20	
633078S	2-7/16	82	55.0	40	81.0	1366	1 / 12	
633080S	2-1/2	84	55.0	40	81.0	1460	1 / 12	
633082S	2-9/16	85	58.0	43	83.0	1510	1 / 12	
633084S	2-5/8	86	58.0	43	83.0	1510	1 / 12	
633086S	2-11/16	90	58.0	43	85.0	1555	1 / 12	
633088S	2-3/4	92	58.0	46	88.0	1865	1 / 12	