

- Material - chrome molybdenum alloy steel
- Finishing - phosphate sunk

## Thin Wall Impact Socket

### 8835M



- Thin wall version
- 6 points
- Metric size
- DIN 3121




KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
883524M	24	38.0	54	26	80	626	1 / 24
883527M	27	42.0	54	26	80	643	1 / 24
883529M	29	44.0	54	26	80	700	1 / 24
883530M	30	46.0	54	30	80	696	1 / 24
883532M	32	48.0	54	30	80	714	1 / 24
883533M	33	49.0	54	30	80	748	1 / 24
883534M	34	50.0	54	30	80	764	1 / 24
883535M	35	52.0	54	32	80	776	1 / 24
883536M	36	53.0	54	32	80	779	1 / 24
883538M	38	56.0	54	32	80	810	1 / 24
883541M	41	59.5	54	32	80	866	1 / 24

## Rear Wheel Socket

### 8534M



- 4 points
- DIN 3121

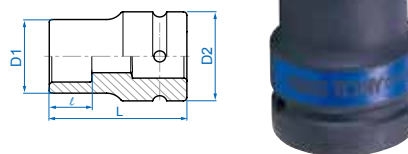


KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
853417M	17	38.0	54	23.5	76	628	1 / 24
853419M	19	43.0	54	23.5	76	682	1 / 24
853421M	21	47.0	54	23.5	76	733	1 / 24

### 8545M



- DIN 3121

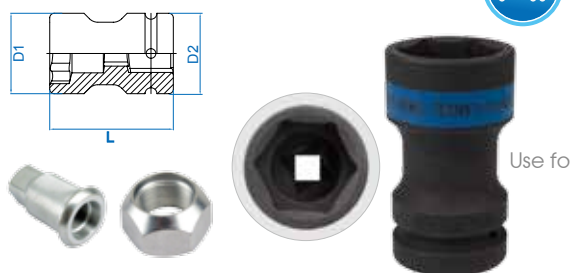

Use for

## Rear Wheel Socket

### 8514M

### 8514S


### 8524M

- 4 points
- DIN 3121



KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
851417M	17	40.0	54	30.0	60	618	1 / 24
851419M	19	42.0	54	30.0	60	618	1 / 24
851420M	20	43.0	54	30.0	60	621	1 / 24
851421M	21	44.0	54	30.0	60	621	1 / 24
851422M	22	45.5	54	30.0	60	621	1 / 24
852421M	21	44.0	48	30.0	60	621	1 / 24

KT NO.	inch	D1 mm	D2 mm	l mm	L mm	g	kg
851426S	13/16	44	54	30.0	60	625	1 / 24

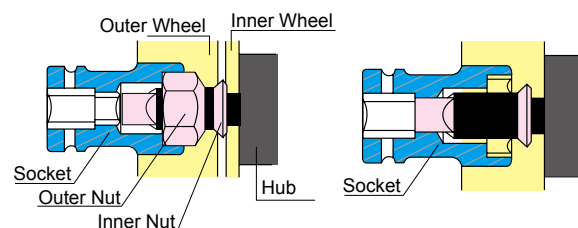

The wheel nut socket fits onto both outer nut and inner nut

KT NO.	mm	D1 mm	D2 mm	l mm	L mm	g	kg
85451735M	35 x 17	54	54	13	83	1042	1 / 24
85451941M	41 x 19	55	54	14	83	985	1 / 24
85452038M	38 x 20	58	54	14	87	1099	1 / 24
85452041M	41 x 20	58	54	14	87	1086	1 / 24
85452141M	41 x 21	58	54	14	87	1071	1 / 24