


T-type Standard Socket Wrench

1175M


- T-shaped stand socket wrench
- Chrome vanadium alloy steel
- DIN 475

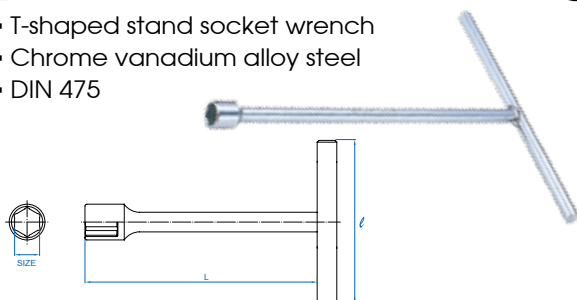

KT NO.	Size mm	ℓ mm	L mm		
117508M	8	120	130	104	10 / 80
117509M	9	120	130	134	10 / 80
117510M	10	120	130	128.6	10 / 80
117511M	11	120	130	137	10 / 80
117512M	12	120	130	198	10 / 80
117513M	13	140	160	235	10 / 80
117514M	14	140	160	241	10 / 80
117517M	17	140	160	301	10 / 80

1185M


- T-shaped stand socket wrench
- Chrome vanadium alloy steel
- DIN 475

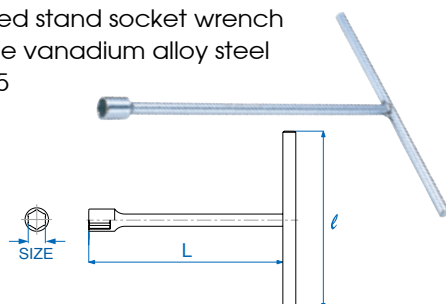

KT NO.	Size mm	ℓ mm	L mm		
118508M	8	200	250	186	10 / 100
118509M	9	200	250	231	10 / 100
118510M	10	200	250	228	10 / 100
118511M	11	200	250	234	10 / 100
118512M	12	250	250	386	10 / 60
118513M	13	250	300	421	10 / 60
118514M	14	250	300	429	10 / 60
118517M	17	300	300	710	6 / 36
118519M	19	300	300	725	6 / 36

115HM


- Shank material - chrome vanadium alloy steel
- Shank finishing - chrome plated
- Grip material - PP

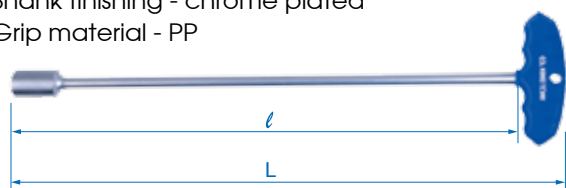

KT NO.	Size mm	ℓ mm	L mm		
115H08M-14	8	350	388	147	10 / 60
115H10M-14	10	350	388	153	10 / 60
115H13M-14	13	350	390	261	8 / 32

5722M


- T-type 25° universal standard socket wrench

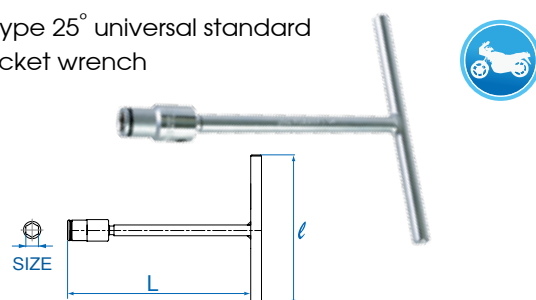

KT NO.	Size mm	ℓ mm	L mm		
572210M	10	150	170	400	10 / 60
572212M	12	150	170	400	10 / 60

5742M


- T-type 25° universal standard socket wrench

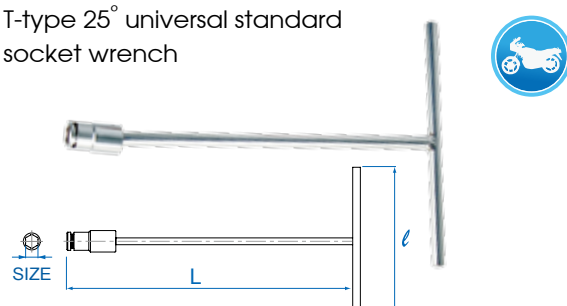

KT NO.	Size mm	ℓ mm	L mm		
574208M	8	200	320	328	10 / 40
574210M	10	200	320	330	10 / 40
574212M	12	200	320	332	10 / 40
574213M	13	200	320	333	10 / 40
574214M	14	200	320	335	10 / 40
574217M	17	200	320	340	10 / 40

5752M

- T-type 25° universal standard socket wrench

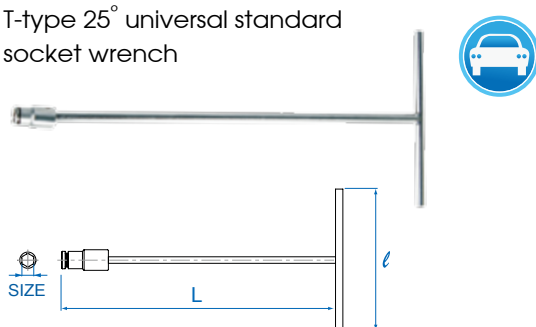

KT NO.	Size mm	ℓ mm	L mm		
575208M	8	200	450	427	10 / 40
575210M	10	200	450	430	10 / 40
575212M	12	200	450	432	10 / 40
575213M	13	200	450	433	10 / 40
575214M	14	200	450	435	10 / 40
575217M	17	200	450	440	10 / 40

