

Power Driving

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

1/4" Hex size shank driver

752


- Magnetic bit holder
- 2 PC. type
- With quick-release sleeve
- DIN 7427



KT NO.	 inch	Overall length (mm)		
752-60	1/4	63	33	6 / 72
752-75	1/4	75	32	30 / 600
752-100	1/4	100	38.7	20 / 400
752-150	1/4	150	52	20 / 240
752-300	1/4	300	92.5	20 / 160

753

- 753-63
 - Magnetic bit holder
 - 2 PC. type
 - With quick-release sleeve
 - DIN 7427
- 753-370
 - Quick release bit holder
 - Extra-long extended driver for limited space
 - Magnetic bit holder

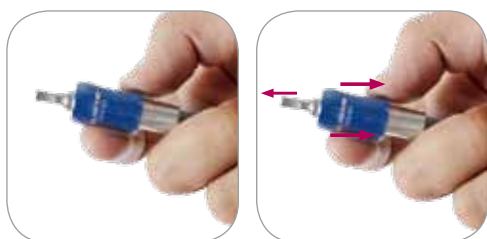

753-63



753-370

KT NO.	 inch	Overall length (mm)		
753-63	1/4	63	33	6 / 72

KT NO.	Size inch	Overall length (mm)		
753-370	1/4	370	170	4 / 48

754

- Universal joint bit holder
- 20 degree pivot mode allows for limited space accessibility
- Can be used in straight or pivot mode



KT NO.	Size inch	Overall Length (mm)		
754-90	1/4	90	52.8	20 / 400

755

- Quick release flexible bit holder
- Flexible shaft driver
- The flex shaft accepts any standard hex fitting
- Quick release fits double end power bits and 50mm power bits



Quick release



Removable magnetic tip



Fits double end power bits and 50mm power bits



KT NO.	Size inch	Overall length (mm)		
755-300	1/4	300	293	20 / 60
755-400	1/4	400	385	18 / 36

