

# Power Driving

- Chrome vanadium alloy steel
- Anti-rust oiled, sand-blasted

1/4" Hex size shank driver



## 761M

- Nut setter
- Magnetic type
- DIN 3126



KT NO.	mm	Overall length (mm)		
7615513M	13	55	41.0	6 / 72
7616505M	5	65	27.0	6 / 84
7616506M	6	65	26.8	6 / 84
7616507M	7	65	25.0	6 / 84
7616508M	8	65	30.0	6 / 84
7616510M	10	65	37.0	6 / 72
7616512M	12	65	52.0	6 / 72
7616513M	13	65	54.0	6 / 72

## 761S




KT NO.	mm	Overall length (mm)		
7611008M	8	100	54.0	5 / 200
7611010M	10	100	54.0	5 / 240
7611012M	12	100	63.0	5 / 240
7611507M	7	150	64.6	5 / 200
7611508M	8	150	67.4	5 / 200

new

KT NO.	inch	Overall length (mm)		
7614208S	1/4	42	15.0	6 / 84
7614210S	5/16	42	17.5	6 / 84
7614512S	3/8	45	22.5	6 / 84
7616508S	1/4	65	30.0	6 / 84
7616510S	5/16	65	31.5	6 / 84
7616512S	3/8	65	37.5	6 / 72
7616514S	7/16	65	39.5	6 / 72

## 76B

- Deep well nut setter
- Deep hole for bolt & nut
- Press-fitted high-durability shank
- Use for tightening step clamp in construction




KT NO.	mm	D1 mm	l mm	d mm	L mm		
76B808M	8	12.7	6	6	80	41.8	15 / 300
76B809M	9	13.2	6	7	80	40.8	15 / 300
76B810M	10	14.5	7	7	80	47.8	12 / 240
76B811M	11	15.8	7	9	80	52.8	12 / 240
76B812M	12	16.8	8	9	80	57.8	12 / 240
76B813M	13	17.8	9	10	80	62.8	12 / 240
76B814M	14	19.7	9	12	80	70.8	12 / 240
76B815M	15	20.8	10	12	80	77.8	12 / 240
76B816M	16	21.8	10	14	80	76.8	12 / 240
76B817M	17	23.8	11	14	80	95.8	12 / 144
76B819M	19	25.8	13	15	80	112.8	10 / 120
76B821M	21	27.8	13	19	80	113.8	10 / 120
76B822M	22	29.8	13	19	80	137.8	10 / 120
76B824M	24	31.8	13	21	80	146.8	6 / 96

1/4" & 3/8" & 1/2" Hex size shank driver



## 770

- Socket adapter
- Ball retainer type
- DIN 7428

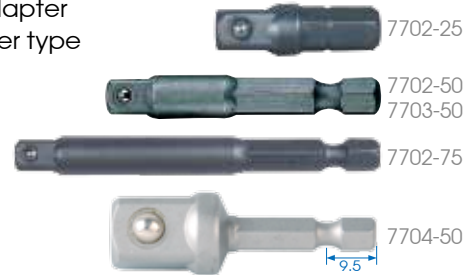

KT NO.	Size	Overall length (mm)		
7702-25	1/4"	25	6.0	20 / 200
7702-50	1/4"	50	13.5	10 / 100
7702-75	1/4"	75	23.5	10 / 100
7703-50	3/8"	50	23.5	6 / 84
7704-50	1/2"	50	24.0	6 / 72

new

## 771


- Socket adapter
- Pin retainer type
- DIN 7428



KT NO.	Size	Overall length (mm)		
7712-02	1/4"	50	12.5	10 / 100
7712-03	1/4"	75	33.5	10 / 100
7713-02	3/8"	50	23.0	6 / 84

## 774


- Bit adapter
- Wobble function provides up to 15° accessibility

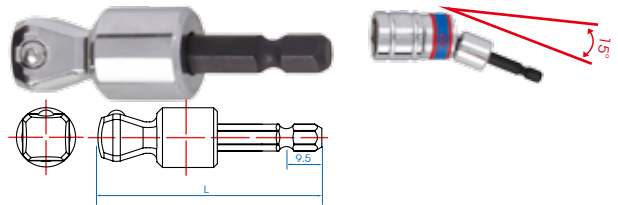

KT NO.	Size	L mm		
7743-56	3/8"	56	30.0	6 / 72
7744-60	1/2"	60	42.8	6 / 72

## 775

- Universal joint socket adapter
- Universal joint function provides up to 30° accessibility

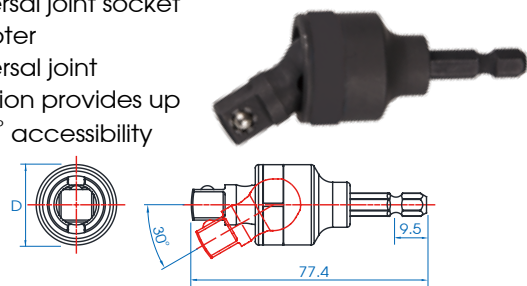

KT NO.	Size	D mm	L mm		
7753-78	3/8"	25	77.4	90.0	6 / 120
7754-85	1/2"	29	84.5	127.6	6 / 96

