




Circuit Tester

9DC22

- Bronze body housing
- Cover cap for contact needle
- Bulb of 24V/3W interchangeable
- Test voltage 6~24V
- For application of D.C. circuits only

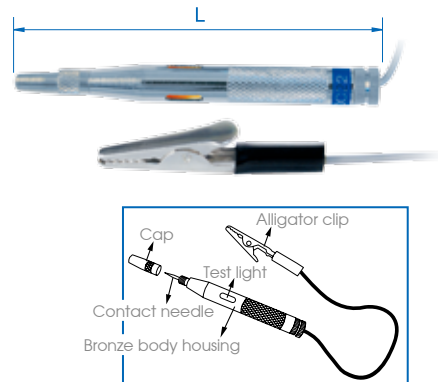

KT NO.	L mm	Test range		
9DC22	107	6~24V	50.0	20 / 200


Automotive Voltage Tester

9DC23

- Insulated alligator clip with 150 cm cable
- 2 LEDs indicate positive(+)/negative(-) polarity
- Test voltage 3~48V
- For application of D.C. circuits only
- Two testing methods as illustration



KT NO.	L mm	Test range		
9DC23	150	3~48V	52.0	12 / 144

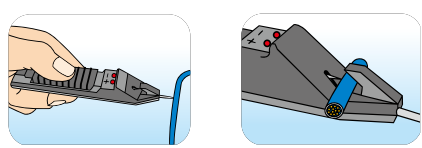

Digital Display Circuit Tester

9DC242 new

- For 6/12/24V DC systems
- For application of DC circuits only
- Check if the circuit is electrified or not by stainless steel stylus
- Bigger heavy duty insulated alligator ground clip
- 3M long retractable cable
- LCD display easy to read digital voltage display
- Powered from the power source being measured, no batteries required
- CE approval EN 61000-6-3(2007) , EN 61000-6-1(2007)
- Do not use on air bags
- Ultra-V will burn circuit board



Specification	
Measured voltage	5~28V
Testing current	<10mA
Operating temp	-10~50° C
Operating humidity	<80%

KT NO.	Test range		
9DC242	6, 12, 24	225	10 / 60

