

Continuous Flow Air Grease Gun with 12" Tube

9BV14T

- Ideal for machine, automobile, farm and garden equipments, vehicles etc.
- 360° rotating handle




KT NO.	Air Inlet (Inch)	Screw Thread	Air Source Range input (psi/bar)	output (psi/bar)	Recommended input (psi/bar)	Air Source output (psi/bar)	Capacity c.c.	oz	Kg	
9BV1410T	1/4" BSPT	1/8" x 28 PT	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~412 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10
9BV1420T	1/4" BSPT	10 x 1.0 Mertric	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~412 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10
9BV1411T	1/4" NPT	1/8" x 28 PT	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~412 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10
9BV1421T	1/4" NPT	10 x 1.0 Mertric	60~150 psi (4.2~10.3 bar)	2400~6000 psi (165~412 bar)	90 psi (6.2 bar)	3600 psi (250 bar)	400	14	1.7	1 / 10
9BU8109	9" length	1/8" x 28 PT								
9BU8209	9" length	10 x 1.0 Mertric								
9BU8112	12" length	1/8" x 28 PT								
9BU8212	12" length	10 x 1.0 Mertric								

9BV1410T / 9BV1411T For general market except North America, Germany, South Africa, Egypt
 9BV1420T / 9BV1421T For Germany, South Africa, Egypt, etc.

Air Blow Gun

7990

- Ideal for cleaning
- Steel nozzle & nylon fiber handle
- Air pressure: 90 PSI recommended
- Air consumption: 1/4" hose-13cfm-350l/min, 3/8" hose-15cfm-430l/min
- Sound pressure: 85~90 dB
- Working pressure: 75~120 PSI/5.0~8.0 kgs
- Max pressure: 200 PSI/ 15 kgs

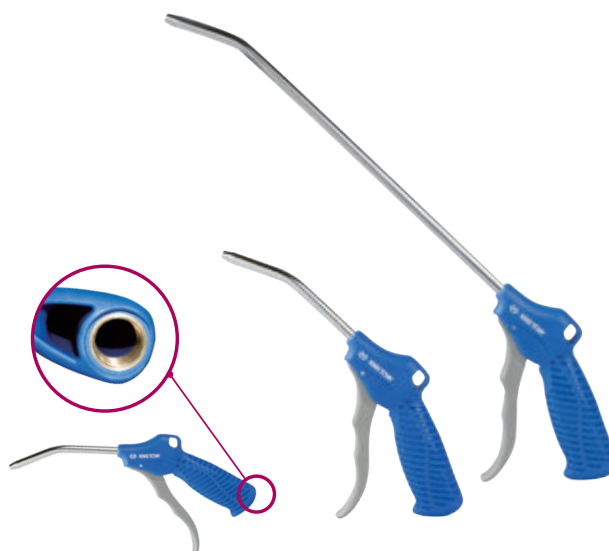

KT NO.	Air Inlet Inch	ℓ Inch	mm	L (mm)		
79900-04	BSPT	4	100	245	200	20 / 100
79900-10	BSPT	10	250	420	240	25 / 50
79900-13	BSPT	13	330	475	260	25 / 50
79900-20	BSPT	20	500	650	300	25 / 50
79901-04	NPT	4	100	245	200	20 / 100
79901-10	NPT	10	250	420	240	25 / 50
79901-13	NPT	13	330	475	260	25 / 50
79901-20	NPT	20	500	650	300	25 / 50

Copper Thread

