




# Digital Clamp Meter

## 9DM2351

- Max clamp size:  $\varnothing$  30mm
- Unit & function indication , maximum reading value 1999 digits
- Negative polarity indicator (no indication is given for positive polarity)
- Auto power off selection approx. 15 minutes
- Low power consumption
- CE approval IEC 61010-1 , IEC 61010-2-032  
CAT.III 600V Pollution Degree 2
- Attachable test leads, easy operation

Specification	
AC Ampere (0.1A - 1A)	200A / 600A
AC Voltages (0.001V - 1V)	2V / 20V / 200V / 600V
DC Voltages (0.1mV - 1V)	200mV / 2V / 20V / 200V / 600V
Resistance (0.1 $\Omega$ - 0.01M $\Omega$ )	200 $\Omega$ / 2k $\Omega$ / 20k $\Omega$ / 200k $\Omega$ / 2M $\Omega$ / 20M $\Omega$
Continuity check	Yes
Diode test	Yes
Low battery indicator	Yes
LCD Display	3 1/2 digits 1999 counts
Sampling rate	3 times / Sec.
Overload indicator	OL

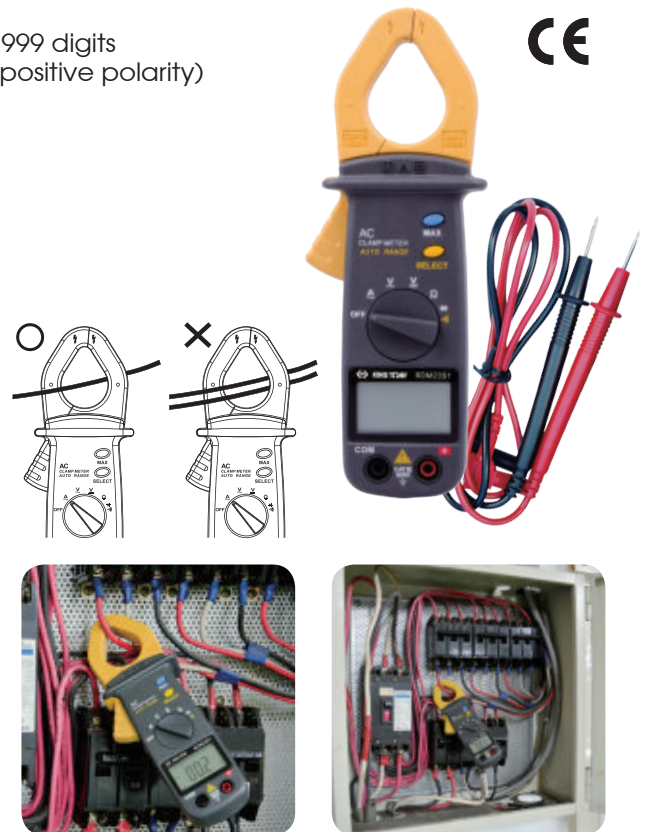

KT NO.	Size (mm)		
	L x W x H		
9DM2351	189 x 71 x 37	354	5 / 40



# AC Non-contact Voltage Tester

## 6CB31

- Voltage ranges : 80 to 1000V AC.(50~60Hz)
- Application :  
AC voltage in outlets, lighting, circuit breakers, wires and cables etc..
- Adjustable sensitivity voltage detection
- Visible LED light voltage indicator in tip  
(Green light is high gear, red light is low gear)
- AAA battery x 2 PC. included
- Standard category :  
EN 61000-6-3 / EN 61000-6-1 CAT III

KT NO.	Overall size (mm)		
	L x W x H		
6CB31	160 x 20 x 24	72	10 / 100

