

Combination Wrench




1062 PAT.



New slimline I-Beam shank offer superior strength with less effort





More powerful open end with big thumb point delivers more torque





13 degree offset ring provides better accessibility


- 15° open end reinforcement design in slim profile
- 13° ring end high relief zone design with thin wall access ability
- Chrome vanadium alloy steel
- Metric - DIN 3113, ISO 7738







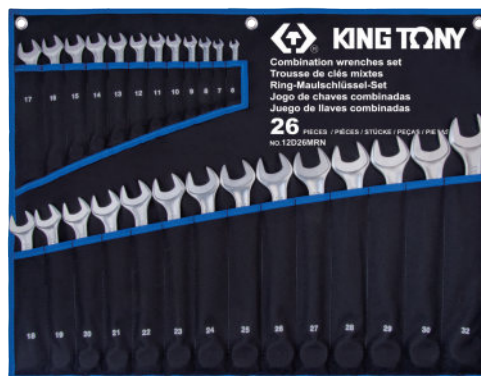

KT NO.	Size mm	L mm		
1062-06	6	105	18	12 / 504
1062-07	7	115	20	12 / 504
1062-08	8	125	25	12 / 504
1062-09	9	135	34	12 / 504
1062-10	10	145	39	12 / 504
1062-11	11	155	46	12 / 504
1062-12	12	165	56	12 / 216
1062-13	13	175	69	12 / 216
1062-14	14	185	80	12 / 216
1062-15	15	195	93	12 / 192
1062-16	16	205	111	12 / 192
1062-17	17	215	119	12 / 192
1062-18	18	225	138	12 / 144

KT NO.	Size mm	L mm		
1062-19	19	235	158	12 / 144
1062-20	20	245	182	12 / 144
1062-21	21	255	203	12 / 96
1062-22	22	265	225	12 / 96
1062-23	23	275	251	12 / 96
1062-24	24	285	287	6 / 54
1062-25	25	295	326	6 / 54
1062-26	26	305	344	6 / 54
1062-27	27	315	371	6 / 54
1062-28	28	325	387	6 / 48
1062-29	29	335	456	6 / 48
1062-30	30	345	514	6 / 48
1062-32	32	365	557	6 / 48

Combination Wrench Set



► MRN / SRN : Teton pouch bag

KT NO.	PC.	Contents	Package		
 12D09MRN	9	8, 9, 10, 11, 12, 13, 14, 17, 19	Teton	0.80	1 / 24
 12D13MRN	13	6, 8, 10, 11, 12, 13, 14, 15, 17, 19, 21, 22, 24	Teton	1.68	1 / 12
 12D15MRN	15	10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32	Teton	3.32	1 / 8
 12D26MRN	26	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32	Teton	5.60	1 / 4