

# Torque Screwdriver


## 34111

- Suitable for 1/4" Hex insert bit; 1/4" socket
- Automatic adjustment knob design
- Easy-to-read laser scale
- Ergonomic comfort rubber grip
- Tolerance of torque  $\pm 5\%$ (CW)
- Quality meets DIN ISO 6789:2017 & ASME B107.300-2010



- Tolerance of torque within  $\pm 5\%$ (CW)

## 34211

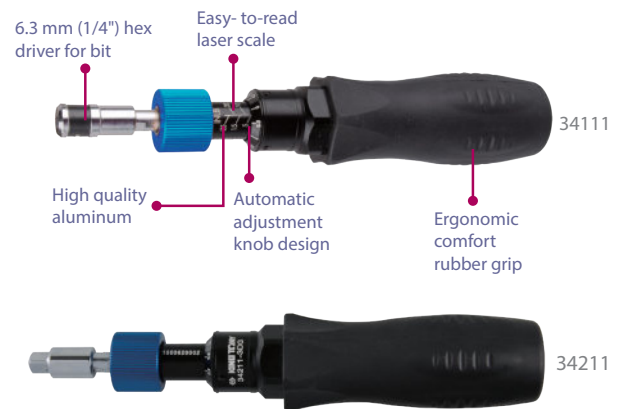

KT NO.	1/4"DR.	Torque range cN·m / N·m / lbf·in	Incr.	Overall length mm		
34111-1DG		30~120 cN·m	1 cN·m	180	207	1 / 24
34111-1EG		3~15 lbf·in	0.1 lbf·in	180	207	1 / 24
34111-2DG		1.5~6.5 N·m	0.1 N·m	196	475	1 / 24
34111-2EG		10~50 lbf·in	0.5 lbf·in	196	475	1 / 24
34211-3DG		4~9 N·m	0.1 N·m	196	475	1 / 24

# Torque Angle Gauge


## 34440

## 34440A

## 34660


## 34660A

- Square Drive :  
34440 ( 1/2" x 1/2" )  
34660 ( 3/4" x 3/4" )
- 360° angle scale- clearly marked in 2° increments, and in intervals of 10° and 30°
- Indicator etched on clear plastic plate, protects angle scale from dirt and grease
- Adjustable arm keeps angle scale stationary
- Arm has two lengths for additional flexibility in placement against components
- Tough composite dial and rotating index allow operator to accurately tighten to meet standard



- Step 1 : Set up the torque value by torque wrench

- Step 2 : Adjust the angle by angle gauge

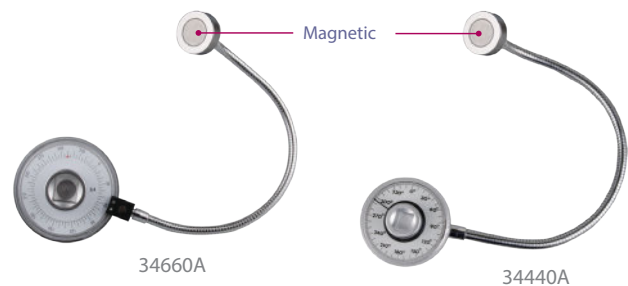

KT NO.	Spec.		
34440	1/2"Fx1/2"M	190	12 / 48
34440A	1/2"Fx1/2"M	375	6 / 24
34660	3/4"Fx3/4"M	666	6 / 12
34660A	3/4"Fx3/4"M	908	6 / 12

