

Accessory

KT No. & D1



- Material - chrome vanadium alloy steel
- Finishing - polished, chrome plated & black phosphate sunk

2453

1/4"

- Flexible handle
- Action degree -180°
- New pattern design added in firm and powerful elements
- New forge technologies I-Beam shank offers 15% lightweight
- DIN 3122



2452DK

KT NO.	Overall length inch mm	g	15 / 270
2453-05F	5 130	71	15 / 270
2452DK	renewal kits	-	-

2571

1/4"


- Sliding T-handle
- DIN 3122



KT NO.	Overall length inch mm	g	12 / 192
2571-45	4-1/2 115	44	12 / 192

2141

- Bit holder
- DIN 3122

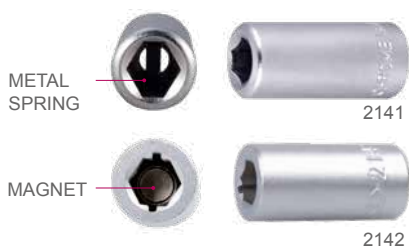

1/4"

KT NO.	Size inch	Overall length mm	g	20 / 320
2141	1/4	25	14.0	20 / 320
2142	1/4	25	15	20 / 320

Socket Rail Set

2509MR

1/4"

- Socket rail 150mmL



9 PC.

Contents	g	4 / 48
2335M 4, 5, 6, 7, 8, 9, 10, 11, 13	0.17	4 / 48
8720609		

2509SR

1/4"

- Socket rail 150mmL



9 PC.

Contents	g	4 / 48
2335S 5/32, 3/16, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2	0.17	4 / 48
8720609		

Socket Rail Set

2513MR

1/4"

- Socket rail 240 mmL



13 PC.

Contents	g	6 / 60
2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	0.23	6 / 60
8721114		

2513MRD1

1/4"

- Socket rail 508 mmL



13 PC.

Contents	g	50
2335M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	0.34	50
8720813D1		

2311MR

1/4"

- Socket rail 240 mmL



13 PC.

Contents	g	6/60
2235M 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14	0.46	6/60
8721114		

2127PR

1/4"

- Socket rail 130mmL
- For hex head screw
- H : 37mm



7 PC.

Contents	g	4/32
2035 H3, H4, H5, H6, H7, H8, H10	0.15	4/32
8720507		

2127SR

1/4"

- Socket rail 130mmL
- For hex head screw
- H : 37mm



7 PC.

Contents	g	4/32
2035S H1/8, H5/32, H3/16, H7/32, H1/4, H5/16, H3/8	0.15	4/32
8720507		