




4863P

- Adapter
- Convert to 3/8", 3/4" drive
- 4863P → Max. torque : 202 N·m
- DIN 3121

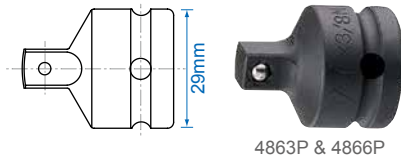

4863P & 4866P


KT NO.	Spec.		
4863P	1/2"F x 3/8"M	97	10 / 160
4866P	1/2"F x 3/4"M	147	8 / 160

90401

- Locking ring
- High tensile rubber material

90601

- Locking pin
- Chrome vanadium steel
- DIN 3129

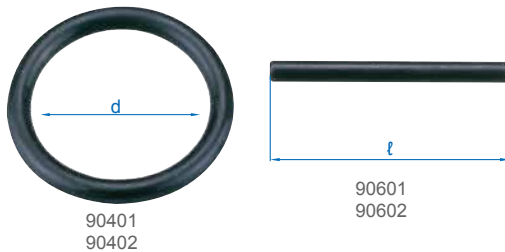

90401
90402

90601
90602

KT NO. Type Ø d / ℓ Applied to socket sizes

90401	ring	3.5	19	4535M (8~14mm)	4535S (15/16"~9/16")
				4435M (8~14mm)	4435S (15/16"~9/16")
				4015M (5~14mm)	4015S (1/4"~1/2")
				4055M (4~14mm)	4055S (3/16"~1/2")
				4935M (10~14mm)	4935S (7/16"~9/16")
				4415M (17mm)	4575 (E10~E18)
90601	pin	3.0	20	4835M (10~17mm)	
				4530M (8~14mm)	
				414A08S.4053.4063.4065.4075.4873.4015	
				4147.4055.4056	
				4535M (15~46mm)	4535S (11/16"~1-1/4")
				4435M (15~46mm)	4435S (5/8"~1-1/4")
90402	ring	3.5	23	4935M (16~30mm)	4935S (11/16"~1-1/4")
				4015M (17.19mm)	
				4415M (19.21mm)	
				4530M (15~36mm)	
				4575M (E20)	
				4835M (19~30mm)	
90602	pin	3.0	25	4260.4796.4797.4863.4873.4866	

Impact Socket Rail Set

4423MP

- Thin wall version



3
PC.

KT NO.	Contents		
4423MP	4835M	0.45	48

7411PP

1/2"



11
PC.

KT NO.	Contents		
7411PP	3575M	E5, E6, E7, E8	
	4575M	E10, E12, E14, E16, E18, E20	
	4863P	1/2"F x 3/8"M	

4421MP1

1/2"



11
PC.


KT NO.	Contents		
4421MP1	3575M	1.69	1 / 12

Impact Socket Set

4408MP

1/2"

- Metal case size (mm) :
- 270 x 73 x 46 (0.032 cuft)

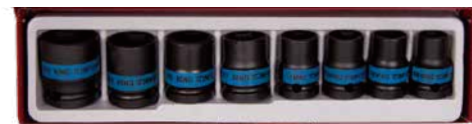

8
PC.

KT NO.	Contents		
4408MP	4535M	1.3	1 / 20

Impact Socket Set

4408SP

1/2"

- Metal case size (mm) :
- 270 x 73 x 46 (0.032 cuft)



8
PC.

KT NO.	Contents		
4408SP	4535S	1.3	1 / 20