


Impact Accessory

KT No. & D1



6260

- Extension bar
- DIN 3121

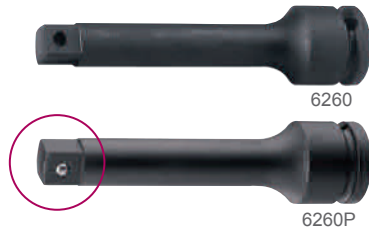

KT NO.	Overall length inch	mm	D mm		
6260-04	4	100	566	2 / 20	
6260-07	7	175	864	2 / 20	
6260-10	10	250	1145	1 / 16	
6260-13	13	330	1450	1 / 10	
6260-04P	4	100	566	2 / 20	
6260-07P	7	175	864	2 / 20	
6260-10P	10	250	1145	1 / 16	
6260-13P	13	330	1450	1 / 10	

90403

90404

90405

3/4"

- Locking ring
- High tensile rubber material

90603

90604


90607

3/4"

- Locking pin
- Chrome vanadium steel
- DIN 3129



90603 / 90604 / 90607



90403 / 90404 / 90405


KT NO. Type Ø d / l Applied to socket sizes

90403	ring	3.5	33	6015M (14~19mm)
				6435S (3/4"~1")
				6510M (17~30mm)
				6535S (1 1/16"~1-3/16")
				6515M (17~30mm)
90607	pin	3.0	30	6935S (3/4"~1")
				6874
90404	ring	5.5	37	6535M (17~46mm)
				6535S (1-1/4"~1-13/16")
				6435M (19~46mm)
				6435S (1-1/16"~1-13/16")
				6935M (19~32mm)
				6935S (1-1/16"~1-1/4")
				6015M (21~27mm)
90603	pin	4.0	35	6260.6797.6798.6864
				6530M (17~46mm) 6868
				6835M (17~32mm)
				609616M.609622M
90405	ring	5.5	44	6535M (48~65mm)
				6535S (1-7/8"~2-3/8")
				6435M (48~50mm)
90604	pin	4.0	45	6435S (1-7/8"~2")

6864

6868

- Adapter
- Convert to 1/2" drive
- 6864 → Max. torque : 512 N·m
- DIN 3121



6864 / 6864P
6868 / 6868P



6864 & 6868



6864P & 6868P


KT NO.	Spec.	D (mm)		
6864	3/4"F x 1/2"M	44	311	6 / 48
6868	3/4"F x 1"M	44	445	6 / 48
6864P	3/4"F x 1/2"M	44	311	6 / 48
6868P	3/4"F x 1"M	44	445	6 / 48

6874

6874P

3/4"

- Adapter
- Convert to 1/2" drive
- 6874 → Max. torque : 512 N·m
- DIN 3121



6874 / 6874P



6874



6874P

KT NO.	Spec.	D (mm)		
6874	3/4"F x 1/2"M	38	233	6 / 48
6874P	3/4"F x 1/2"M	38	233	6 / 48

786P06

1/4" 3/8" 1/2" 3/4"

- Square drive adaptor to DIN 3121 / ISO 1174 with ball lock
- Internal square drive to DIN 3121 / ISO 1174
- For machinery usage



6 PC. CR-MO DIN 3121

KT NO.	Contents		1.31		1 / 20
786P06	M 3/8 DR. 2863P	F 1/4 DR.	M 1/4 DR. 3862P	F 3/8 DR.	
	3/8 DR. 4863P	1/2 DR.	3/4 DR. 4866P	1/2 DR.	
	1/2 DR. 3864P	3/8 DR.	1/2 DR. 6864P	3/4 DR.	