


Super Duty Composite Impact Wrench

33461

- Lightweight 17%
- One-handed F/R control, Easy forward/reverse switch
- 4-speed power setting, full speed in reverse
- TPR Handle that can help to reduce the effect of vibration on the operator



1/2"
33461

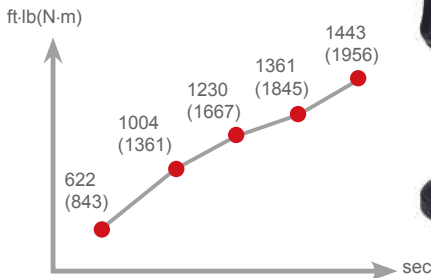

- TPR ergonomic handle material reduces vibration

- 3-speed power setting, full speed in reverse

KT NO.	Square drive inch mm	Std. bolt size inch mm	Free speed R.P.M	Max. torque ft-lb N-m	Overall length inch mm	Air inlet inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S2	Net weight kgs lbs	
33461-100	1/2" 12.70	1" M24	9500	1000 1356	7.5 190	1/4" BSPT	3/8"	6.2 90	207 7.3	99.2	13.32	2.30 5.28	1 / 8
33461-101	1/2" 12.70	1" M24	9500	1000 1356	7.5 190	1/4" NPT	3/8"	6.2 90	207 7.3	99.2	13.32	2.30 5.28	1 / 8


Ultra Compact Angle Impact Wrench

33491

- Easy to work in confined space, head length 88mm
- Ergonomic handle in hand and great power setting
- Lightweight : 1.4Kg
- Max. torque : 350ft-lb (475N-m) in reverse



1/2"
33491

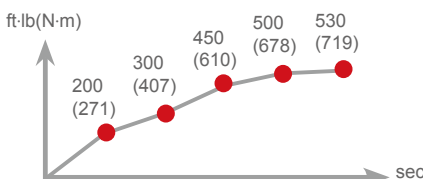

3-speed power setting



- 360° swivel exhaust deflector



- Gearless hammer design
- Reduces vibration by 50%, Increases torque by 20%



KT NO.	Square drive inch mm	Std. bolt size inch mm	Free speed R.P.M	Max. torque ft-lb N-m	Overall length inch mm	Air inlet inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S2	Net weight kgs lbs	
33491-030	1/2" 12.70	9/16" M14	6,500	300 407	9-64/49" 248	1/4"BSPT	3/8"	6.2 90	119 4.2	94.00	7.48	1.40 3.09	1/12
33491-031	1/2" 12.70	9/16" M14	6,500	300 407	9-64/49" 248	1/4"NPT	3/8"	6.2 90	119 4.2	94.00	7.48	1.40 3.09	1/12