


Impact Wrench

33431

- One-handed F / R control
- Convenient to switch on both sides
- 3-speed regulator for precise control
- Ergonomic design interchangeable rubber grip

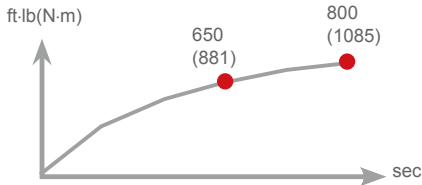

KT NO.	Square drive inch mm	Type Std/Long anvil	Std. bolt size inch mm	Free speed R.P.M	Max. torque ft-lb N-m	Overall length inch mm	Air inlet inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S2	Net weight kgs lbs	
33431-065	1/2" 12.70	Std.anvil	3/4" M19	8000	650 881	6-7/8" 175	1/4"BSPT	3/8"	6.2 90	139 4.9	101.50	9.37	2.58 5.69	1 / 8

Composite Impact Wrench

33481

- One-handed F / R control
- 4-speed power setting, full speed in reverse
- TPR ergonomic handle material reduces vibration



33681



KT NO.	Square drive inch mm	Type Std/Long anvil	Std. bolt size inch mm	Free speed R.P.M	Max. torque ft-lb N-m	Overall length inch mm	Air inlet inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S2	Net weight kgs lbs	
33481-095	1/2" 12.70	Std.anvil	1" M24	8000	950 1288	7-3/4" 197	1/4"BSPT	3/8"	6.2 90	190 6.7	96.00	8.10	2.25 4.96	1 / 8
33481-096	1/2" 12.70	Std.anvil	1" M24	8000	950 1288	7-3/4" 197	1/4"NPT	3/8"	6.2 90	190 6.7	96.00	8.10	2.25 4.96	1 / 8
33681-100	3/4" 19.05	Std.anvil	1-3/16" M30	8000	1100 1491	8-3/8" 211	1/4"BSPT	3/8"	6.2 90	190 6.7	96.00	8.98	2.35 5.20	1 / 8
33681-101	3/4" 19.05	Std.anvil	1-3/16" M30	8000	1100 1491	8-3/8" 211	1/4"NPT	3/8"	6.2 90	190 6.7	96.00	8.98	2.35 5.20	1 / 8