


Heavy Duty Interchangeable Torque Wrench

- Using standard insert head
- Positive button design which removes the insert head easily
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque $\pm 3\%$ (CW)
- CW/CCW Direction

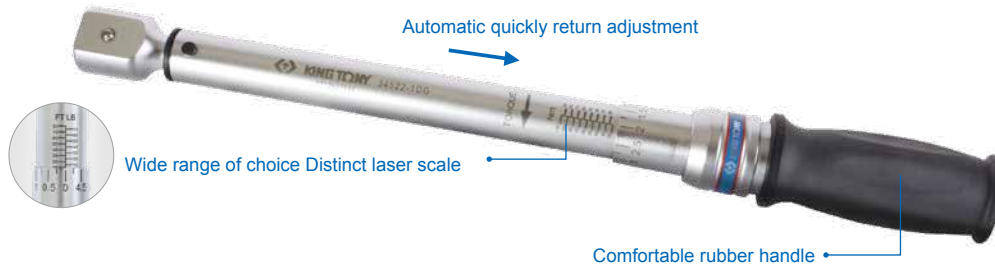

Interchangeable Series **in.lb / ft.lb & N.m**

9*12 34512

KT NO	Size mm	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr.	Overall length mm		
34512-1CG	9*12	20~100 in.lb	1 in.lb	2.8~10.7 N.m	0.12 N.m	261	510	1/12
34512-2CG	9*12	40~200 in-lb	1 in.lb	5.1~22.0 N.m	0.12 N.m	306	590	1/12
34512-3CG	9*12	15~80 ft.lb	0.5 ft.lb	23.7~105.1 N.m	0.7 N.m	403	1286	1/12

14*18 34522

KT NO	Size mm	Torque range in.lb/ft.lb	Incr.	Torque range N.m	Incr.	Overall length mm		
34522-1CG	14*18	15~80 ft.lb	0.5 ft.lb	23.7~105.1 N.m	0.7 N.m	430	1286	1/12
34522-2CG	14*18	20~150 ft.lb	1 ft.lb	34~197 N.m	1.4 N.m	485	1410	1/12
34522-3CG	14*18	50~250 ft.lb	1 ft.lb	75~332 N.m	1.4 N.m	585	1602	1/12

Interchangeable Series **N.m**

9*12 34512

KT NO	Size mm	Torque range N.m	Incr.	Overall length mm		
34512-1DG	9*12	2~10 N.m	0.1 N.m	261	510	1/12
34512-2DG	9*12	4~20 N.m	0.1 N.m	306	590	1/12
34512-4DG	9*12	10~60 N.m	0.5 N.m	306	590	1/12
34512-3DG	9*12	20~100 N.m	0.5 N.m	403	1286	1/12

14*18 34522

KT NO	Size mm	Torque range N.m	Incr.	Overall length mm		
34522-5DG	14*18	10~60 N.m	0.5 N.m	430	1286	1/12
34522-1DG	14*18	20~100 N.m	0.5 N.m	430	1286	1/12
34522-2DG	14*18	40~200 N.m	1 N.m	485	1410	1/12
34522-3DG	14*18	60~340 N.m	2 N.m	585	1602	1/12
34522-7DG	14*18	70~350 N.m	2 N.m	585	1602	1/12
34522-9DG	14*18	80~400 N.m	2 N.m	585	1602	1/12
34522-4DG	14*18	100~600 N.m	5 N.m	1015	6200	1/2
34522-6DG	14*18	150~800 N.m	5 Nm	1195	6620	1/2
34522-8DG	14*18	200~1000 N.m	5 Nm	1200	6620	1/2