


Classic Type Adjustable Torque Wrench

- Design for easy torque adjustment
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque $\pm 4\%$ (CW)
- CW/CCW Direction

5 000
Precision
in use

$\pm 4\%$
Tolerance

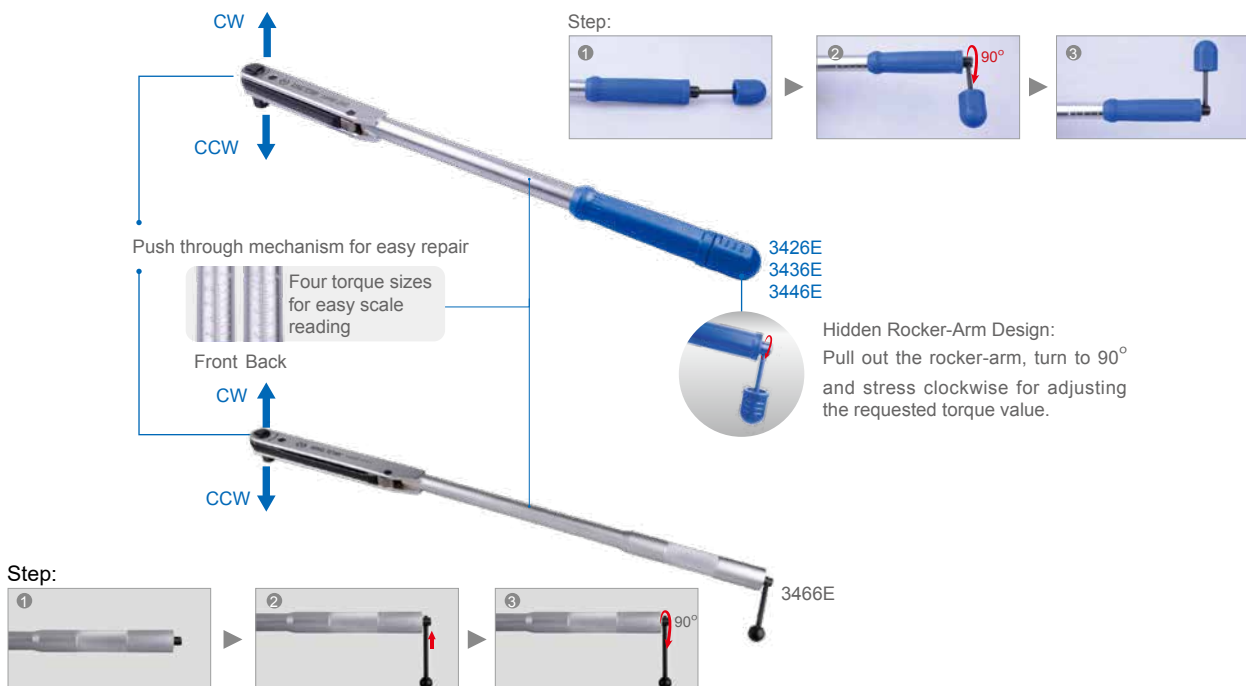

Dual Scale - Newton Meter & English & Kilogram-force meter (N.m / ft.lb / in.lb & kgf.m)

1/4" 3426E

KT NO	Square drive	Torque range								Overall length mm	g	kg	DK
		N.m	Incr.	ft.lb	Incr.	in.lb	Incr.	kgf.m	Incr.				
3426E-1HG	1/4"	2.5~11 N.m	0.5	2~8 ft.lb	1	20~100 in.lb	10	0.3~1.2 kgf.m	0.1	352	630	1 / 12	3426E-1DK

3/8" 3436E

KT NO	Square drive	Torque range								Overall length mm	g	kg	DK
		N.m	Incr.	ft.lb	Incr.	in.lb	Incr.	kgf.m	Incr.				
3436E-1HG	3/8"	2.5~11 N.m	0.5	2~8 ft.lb	1	20~100 in.lb	10	0.3~1.2 kgf.m	0.1	352	740	1 / 12	3436E-1DK
3436E-2HG	3/8"	7~33 N.m	1	5~24 ft.lb	1	60~300 in.lb	10	0.7~3.4 kgf.m	0.1	450	870	1 / 12	3436E-1DK
3436E-3HG	3/8"	14~68 N.m	2	10~50 ft.lb	5	125~600 in.lb	25	1.4~7 kgf.m	0.2	505	1210	1 / 12	3436E-1DK

1/2" 3446E

KT NO	Square drive	Torque range								Overall length mm	g	kg	DK
		N.m	Incr.	ft.lb	Incr.	in.lb	Incr.	kgf.m	Incr.				
3446E-1HG	1/2"	25~135 N.m	5	20~100 ft.lb	2	200~1200 in.lb	50	3~14 kgf.m	1	555	1640	1 / 12	3446E-1DK
3446E-2HG	1/2"	50~225 N.m	5	40~160 ft.lb	5	400~2000 in.lb	50	5~23 kgf.m	1	590	1710	1 / 12	3446E-1DK
3446E-3HG	1/2"	70~330 N.m	10	50~250 ft.lb	5	600~3000 in.lb	100	7~35 kgf.m	1	803	3440	1 / 6	3446E-1DK

3/4" 3466E

KT NO	Square drive	Torque range								Overall length mm	g	kg	DK
		N.m	Incr.	ft.lb	Incr.	in.lb	Incr.	kgf.m	Incr.				
3466E-1HG	3/4"	140~560 N.m	10	100~410 ft.lb	10	1200~5000 in.lb	100	14~57 kgf.m	1	977	8480	1 / 2	3466E-1DK
3466E-2HG	3/4"	200~800 N.m	20	150~600 ft.lb	20	1800~7200 in.lb	200	22~82 kgf.m	2	1033	8860	1 / 2	3466E-1DK