


Click Type Adjustable Torque Wrench

- Industrial application with durability
- Loud click sound and strong impulse when required torque is reached
- Tolerance of torque $\pm 3\%$ (CW)
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Ideal for using on oily, chemical and noisy assembling working field
- CW/CCW Direction

10,000
Precision
in use

$\pm 3\%$
Tolerance

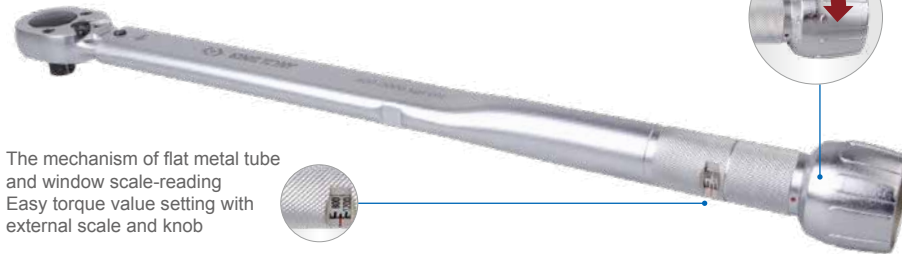

The mechanism of flat metal tube and window scale-reading
Easy torque value setting with external scale and knob

Design for easy torque setting by graduation

3/8" 3432F

KT NO.	Gear teeth	Square drive	Torque range kgf-cm	Incr.	Overall length mm			DK
3432F-1KF	24	3/8"	50-250 kgf-cm	2.5 kgf-cm	240	450	1 / 24	3432F-1DK
3432F-3KF	24	3/8"	200-1000 kgf-cm	10 kgf-cm	342	800	1 / 12	3442F-1DK

1/2" 3442F

KT NO.	Gear teeth	Square drive	Torque range kgf-cm	Incr.	Overall length mm			DK
3442F-1KF	24	1/2"	200-1000 kgf-cm	10 kgf-cm	342	800	1 / 12	3432F-1DK
3442F-3KF	24	1/2"	400-2000 kgf-cm	20 kgf-cm	498	1500	1 / 12	3442F-1DK

Adjustable Torque Wrench

- Design for easy torque adjustment
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010
- Tolerance of torque $\pm 4\%$ (CW)
- CW/CCW Direction

5,000
Precision
in use


$\pm 4\%$
Tolerance



Quick release

Comfortable rubber handle

Automatic quick return adjustment



- The production of injection molding helps it against come off
- One hand operation
- Quick torque set
- Automatic torque locking

1/2" 34464

KT NO	Gear teeth	Square drive	Torque range			Overall length mm			DK
			N.m	ft.lb	Incr.				
34464-1FG	24	1/2"	40-210 N.m (33.2-151.2 ft.lb)		1.0 N.m	470	1250	1 / 12	34464-1DK
34464-2FG	24	1/2"	70-340 N.m (62.7-239.7 ft.lb)		3.0 N.m	590	1590	1 / 12	34464-1DK