

Adjustable Torque Wrench Set

344251A12MR
1/2"

- Blow case size (mm) :
- 500 x 125 x 70 (0.15cuft)

Contents

2.85 1 / 10

34423-1A 42~210 N·m

 4335MR [13, 14, 15, 16, 17, 18, 19, 21, 22, 24](#)

4251-04R

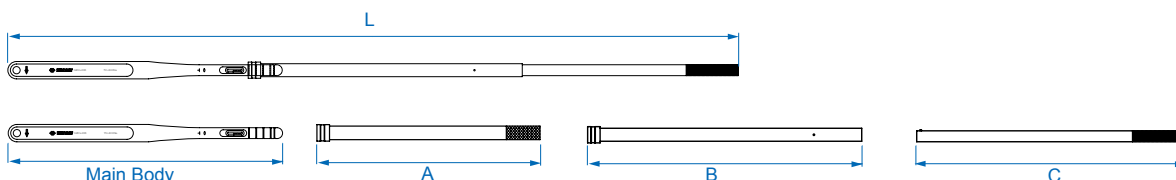

**12
PC.**

Heavy Duty Adjustable Aluminum Torque Wrench

- Industrial application
- Lightweight and robust housing made by aluminium alloy
- Multi-lever mechanism brings length independence and accurate torque
- Loud click sound and string impulse when torque value reached
- Easy lock and adjustment design
- Tolerance of torque $\pm 3\%$ (CW)
- Quality accords to DIN ISO 6789:2017 & ASME B107.300-2010

10 000
Precision
in use

 $\pm 3\%$
Tolerance

Step:

1/2" 3445G

KT NO.	Square drive	Torque range				Main Body	A	B	C	Overall length mm		
		N.m	Incr.	ft·lb	Incr.							
3445G-1FB	1/2"	40~200 N.m	5	30~150 ft.lb	5	563	-	-	-	563	1.50	1 / 12

3/4" 3465G

KT NO.	Square drive	Torque range				Main Body	A	B	C	Overall length mm		
		N.m	Incr.	ft·lb	Incr.							
3465G-1FB	3/4"	110~550 N.m	10	80~400 ft.lb	10	827	-	-	-	827	3.00	1 / 2
3465G-2FB	3/4"	140~760 N.m	10	100~560 ft.lb	10	827	-	-	-	827	3.00	1 / 2
3465G-3FB	3/4"	200~1000 N.m	10	140~740 ft.lb	10	808	762	-	-	1413	3.80	1 / 2

1" 3485G

KT NO.	Square drive	Torque range				Main Body	A	B	C	Overall length mm		
		N.m	Incr.	ft·lb	Incr.							
3485G-1DB	1"	600~1500 N.m	25	-	-	945	-	771	362	1615	10.90	1 / 1
3485G-2DB	1"	750~2000 N.m	50	-	-	947	-	945	924	2370	16.30	1 / 1