


Electronic Torque Wrench

- Electronic torque value readout
- Peak and trace mode selection
- Buzzer and LED indicator for presetting target torque
- Engineering units (N·m, ft·lb, in·lb, kgf·m) adjustment
- Switch off automatically after 60 seconds
- DIN ISO 6789:2017 & ASME B107.300-2010
- CW $\pm 2\%$ and CCW $\pm 3\%$
- Battery : AAA dry battery(Battery not included)



- Electronic Torque Wrench

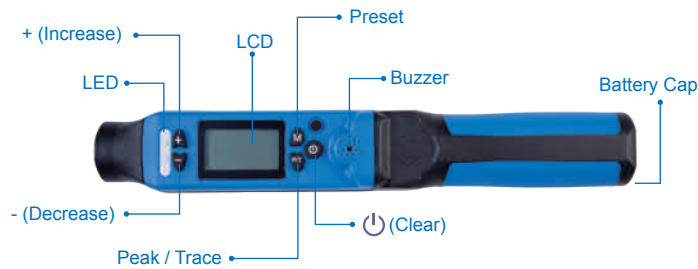

Torque Accuracy	CW $\pm 2\%$ / CCW $\pm 3\%$
Preset Function	10
Display Resolution	0.1 N·m/ ft·lb , 1.0 in·lb, 0.01 kgf·m
Operation Mode	Peak/Trace
Battery	AAAx3 (Battery not included)
Backlight	Yes (Negative)
Alert	LED & Buzzer
Operating Ambient Temperature	-10°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Operation Relative Humidity	15 to 90% noncondensing



- Dual Scale - Newton Meter & English & Kilogram-force meter (N·m / in·lb / ft·lb & kgf·m)

KT NO.	Gear teeth	Square drive	Torque range				Overall length mm			
			N.m	in.lb	ft.lb	kgf.m				
• 34367-2AG-1	72	3/8"	27-135 N.m	239~1195 in.lb	19.9-99.6 ft.lb	2.75~13.76 kgf.m	460	1400	3 / 6	
• 34467-1AG-1	36	1/2"	40-200 N.m	354~1770 in.lb	29.5-147.5 ft.lb	4.08~20.38 kgf.m	530	1500	3 / 6	