

Metric Feeler Gauge

77328-26

- 26 blades inch feeler gauge

CONTENTS :

- 0.0015", 0.002", 0.0025", 0.003",
- 0.004", 0.005", 0.006", 0.007",
- 0.008", 0.009", 0.010", 0.011",
- 0.012", 0.013", 0.014", 0.015", 0.016", 0.017", 0.018",
- 0.019", 0.020", 0.021", 0.022", 0.023", 0.024", 0.025"
- 0.038, 0.051, 0.063, 0.076, 0.102, 0.127, 0.152, 0.178,
- 0.203, 0.229, 0.254, 0.279, 0.305, 0.330, 0.356, 0.381,
- 0.406, 0.432, 0.457, 0.483, 0.508, 0.533, 0.559, 0.584,
- 0.610, 0.635 mm



KT NO.	Number of blades	Width x Length of blades (mm)		
77328-26	26	12.7 x 76	91	14 / 168

Round Magnetic Tool Holder

9TE11



CAUTION Please wear proper safety gear while working.



- Stainless steel tray resists corrosion
- Can be used horizontally, vertically, and upside down
- Convenient for collecting small parts and tools
- Magnetic field intensity: 1000-1200 gauss
- Magnetic power 1kg



KT NO.	Size mm		
9TE11	Ø 150	433	1 / 30

Revolving Punch Pliers

74A00

- To punch holes into leather, textiles and soft material
- Revolving steel head has unique waste collection facility


KT NO.	Punch size mm	Overall length mm		
74A00	2, 2.5, 3, 3.5, 4, 4.5	230	366	10 / 60



Roller Chain Detacher

3214

KT NO.	For chain size ANSI NO.		
3214-35	35~50	310	1 / 60
3214-60	60~100	691	1 / 20

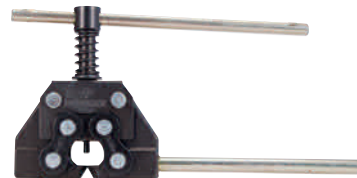

Retractable Tool Lanyard


79A21-30

79A22-30

- Retractable tool lanyard
- 3 kgs maximum tool weight
- Nylon tether with steel spring inside to absorb the shock of a dropped tool
- Increases safety and productivity
- Ergonomically designed length



KT NO.	Capacity mm	Hook		
79A21-30	800~1300	2 lock snaps	106	12 / 144
79A22-30	800~1300	fixed loop	89	12 / 144

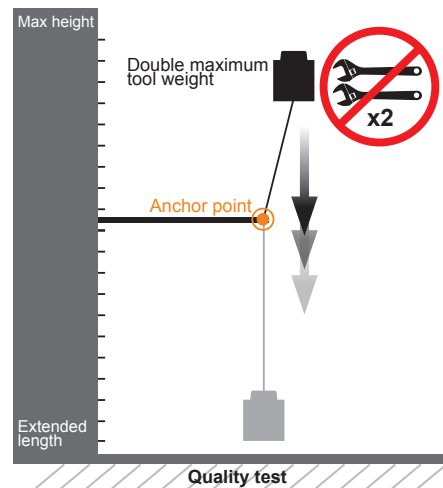

- The retractable tool lanyards are developed according to KING TONY standard. The steel lanyards are tested by double maximum weight and dropped from height. Product quality is approved.