

LED Slim Inspection Light (600 Lumen)

9TA261

- 6W COB + 1W SMD (Top)
- White light color, kelvin : 6500K
- Switch modes : Top light – Worklight low-Worklight high-Off
- Rechargeable battery : 3.7V - 2600mAh Li-ion
- Charging time : 4 hours
- Materials : ABS plastic + rubber housing + PC lens + aluminium slim housing
- Accessory : Type-C USB Charging cable and 5V 1A USB charger
- Features : 120° Angle rotation & magnetic base
- IP54 dustproof and waterproof
- IK07 impact resistance

600
Lumen

6W

3-8h

8.6
mm

CE

RoHS


Type-C
USBLi-ion
2600mAh
3.7V

4h

IP 54
IK07

RoHS

Switch mode	Lumen	Operating hours
Top light	120 lm	8h
Main light low	250 lm	6h
Main light high	600 lm	3h

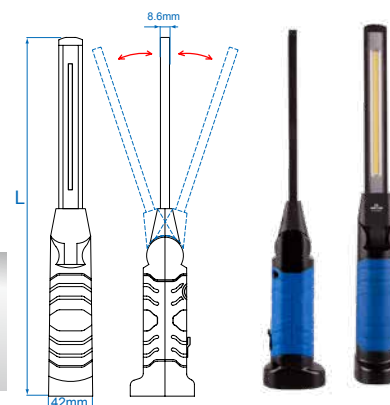

KT NO.		Applicable area	L mm		 / 
9TA261A		Europe	340	300	1 / 12
9TA261B		America & Asia	340	300	1 / 12
9TA261D		Australia & New Zealand	340	300	1 / 12

Contents

COB LED lamp		x 1 PC.
Type-C USB cable		x 1 PC.
USB charger		x 1 PC.

Flexible Rechargeable Inspection Light (500 Lumen)

9TA251

- 5W COB + 3W SMD (Top)
- White light color, kelvin : 6000K~6500K
- Rechargeable battery : 3.7V - 2600mAh Li-ion battery
- Charging time : 4 hours
- Material : PA + TPE housing
- Accessory : Type-C USB Charging cable and 5V 1A USB charger
- Features : Flexible Gooseneck + 90° hiding hook + Strong magnetic base
- Three leds battery indicator
- IP54 dustproof and waterproof
- IK07 impact resistance

500
Lumen

5W

2-16h

CE

RoHS

Type-C
USBLi-ion
2600mAh
3.7V

4h

IP 54
IK07

Switch mode	Lumen	Operating hours
Top light	120 lm	9h
Main light Min ~ Max	50~500 lm	16~2h



- Top SMD
- USB charger port + battery indicator
- Strong magnetic + 90° Hook
- Stepless Dimmer Switch



KT NO.		Applicable area	L mm			
9TA251A		Europe	475	322	1	12
9TA251B		America & Asia	475	322	1	12
9TA251D		Australia & New Zealand	475	322	1	12

Contents

Flexible slim lamp		x 1 PC.
USB charger		x 1 PC.
Type-C USB cable		x 1 PC.