

# Two-post Lift with Floor Plate

9TYP8221 **new**

9TYP8212 **new**

9TYP8222 **new**

9TYP8211 **new**



- Manual release from two sides, double insurance self-locking protection device, safe and easy to operate
- Equalization of two steel cables force both sliding blocks to move synchronously, effectively prevent the vehicle from tilting
- Minimum height of the lifting pad is 110 mm, easily lift and suitable
- Equip aluminum motor and car door-opening protection as standard configuration.
- Reliable oil cylinder, adopts chrome-plating honed cylinder and piston rod, with Italian seals on hydraulic rams, ensure long service life
- Passed 115% dynamic test and 150% static test



9TYP8221A-04A-B  
9TYP8222A-04A-B



9TYP8212A-04A-B  
9TYP8211A-04A-B

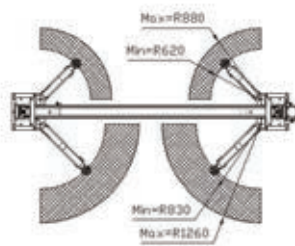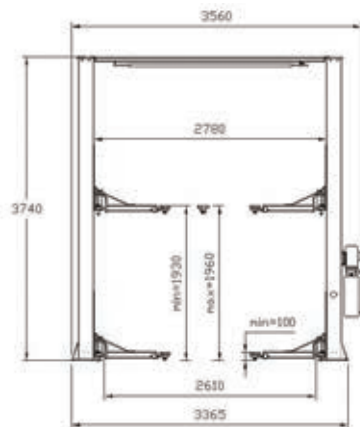

KT NO.	Power	Capacity	N.W	G.W	CUFT
9TYP8222A-04A-B	220V	4T	542	556	1.21
9TYP8221A-04A-B	380V		542	556	1.21
9TYP8212A-04A-B	220V		631	634	1.08
9TYP8211A-04A-B	380V		631	634	1.08