



Standard Type Hydraulic Garage Jack

9TYT132

- Double pump design for fast operation




- Fast lifting dual pump

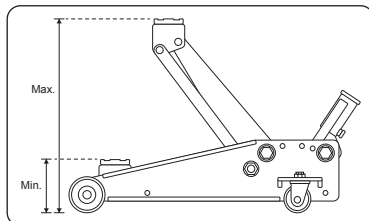

KT NO.	Capacity (T)	Min height (mm)	Max height (mm)	N.W (kg)	G.W (kg)	CUFT	
9TYT132-03A-B	3	133	465	30.8	33.4	1.98	1/1

9TYT138


- Extra height adjustment for pad
- Extra carry handle for convenient transportation

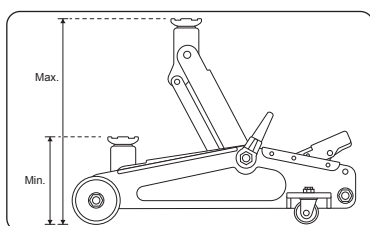

KT NO.	Capacity (T)	Min height (mm)	Max height (mm)	N.W (kg)	G.W (kg)	CUFT	
9TYT138-02A-B	2	135	380	10.2	11	0.77	1/1

9TY132A

- Foot pedal design for quick lift

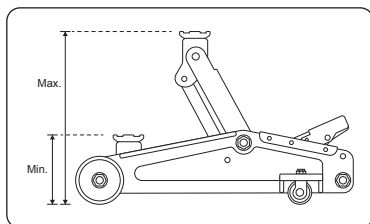

KT NO.	Capacity (T)	Min height (mm)	Max height (mm)	N.W (kg)	G.W (kg)	CUFT	
9TY132A-35A-B	3.5	145	500	37.2	38.4	1.51	1/1