


Deep Socket

KT No. & D1

4235M

- Metric-DIN 3124, ISO 2725-1
- ANSI / ASME B107.1



4235S

1/2"




KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	g	g
423508M	8	13.2	22.0	16	77	90	6	120
423509M	9	14.0	22.0	16	77	81	6	120
423510M	10	15.2	23.7	24	77	102	6	120
423511M	11	16.3	23.7	24	77	103	6	120
423512M	12	17.7	23.7	24	77	113	6	120
423513M	13	18.7	23.7	24	77	119	6	120
423514M	14	20.2	23.7	35	77	121	6	120
423515M	15	21.3	23.7	35	77	126	6	120
423516M	16	22.6	23.7	35	77	130	6	96
423517M	17	23.7	23.2	35	77	127	6	96
423518M	18	25.5	23.2	35	77	149	6	96
423519M	19	25.7	23.2	35	77	133	6	96
423520M	20	27.7	24.0	35	77	158	6	96
423521M	21	27.7	25.0	35	77	155	6	96
423522M	22	29.8	26.0	35	77	185	6	96
423523M	23	31.8	27.5	35	77	218	5	60
423524M	24	31.8	28.5	35	77	211	5	60
423525M	25	33.8	29.5	35	77	251	5	60
423526M	26	35.8	30.5	35	77	236	5	60
423527M	27	35.8	31.5	34	77	295	5	60
423528M	28	37.8	32.5	34	77	281	5	50
423529M	29	37.8	33.5	34	77	292	5	50
423530M	30	39.8	34.5	34	77	301	5	50
423532M	32	41.8	36.0	34	77	330	5	50
423533M	33	43.8	38.5	35	77	373	5	50
423534M	34	44.8	38.5	35	77	478	5	50
423536M	36	46.8	40.5	36	77	478	2	40
423538M	38	49.0	40.5	38	77	504	2	40
423541M	41	53.0	40.5	40	77	521	2	24

KT NO.	inch	D1 mm	D2 mm	ℓ mm	L mm	g	g	g
423510S	5/16	13.2	22.0	16	77	90	6	120
423512S	3/8	14.7	22.0	16	77	84	6	120
423514S	7/16	16.3	23.7	24	77	104	6	120
423516S	1/2	18.7	23.7	24	77	116	6	120
423518S	9/16	20.2	23.7	35	77	123	6	120
423520S	5/8	22.6	23.7	35	77	130	6	96
423522S	11/16	23.7	22.5	35	77	124	6	96
423524S	3/4	25.7	23.2	35	77	131	6	96
423526S	13/16	27.7	25.0	35	77	157	6	96
423528S	7/8	29.8	26.0	35	77	181	6	96
423530S	15/16	31.8	28.5	35	77	218	5	60
423532S	1	33.8	29.5	35	77	223	5	60
423534S	1-1/16	36.6	31.5	34	77	266	5	60
423536S	1-1/8	37.8	32.5	34	77	262	5	50
423538S	1-3/16	39.8	34.5	34	77	296	5	50
423540S	1-1/4	41.8	36.0	34	77	327	5	50
423542S	1-5/16	44.0	38.5	35	77	430	5	50
423544S	1-3/8	46.0	38.5	35	77	452	2	40
423546S	1-7/16	47.5	40.5	36	77	485	2	40
423548S	1-1/2	49.0	40.5	38	77	507	2	40

4245M

EXTENDED LENGTH 1/2"

- DIN 3120

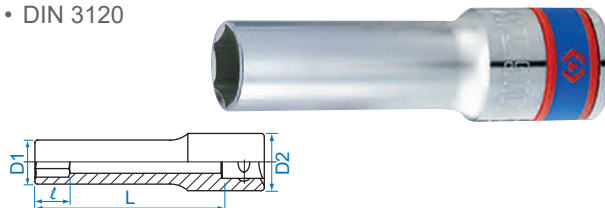


KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	g	g
424508M	8	13.2	21.7	9.0	90	104	6	120
424509M	9	14.0	21.7	10.0	90	106	6	120
424510M	10	15.2	23.7	11.0	90	130	6	120
424512M	12	17.7	23.7	13.0	90	152	6	120
424513M	13	18.7	23.7	14.0	90	151	6	120
424514M	14	20.2	23.7	15.0	90	159	6	120

4255M

EXTENDED LENGTH 1/2"

- DIN 3120

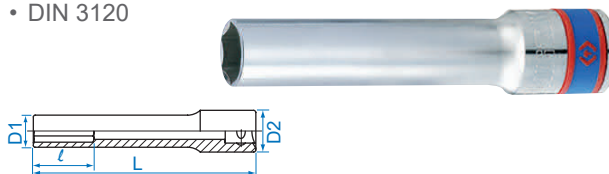


KT NO.	mm	D1 mm	D2 mm	ℓ mm	L mm	g	g	g
425508M	8	13.2	21.7	9	120	127	6	96
425509M	9	14.0	21.7	10	120	134	6	96
425510M	10	15.2	23.7	11	120	160	6	96
425512M	12	17.7	23.7	13	120	195	6	96
425513M	13	18.7	23.7	14	120	201	6	96
425514M	14	20.2	23.7	15	120	202	6	96

Square Socket

4014M

1/2"

- DIN 3120



KT NO.	mm	inch	D mm	ℓ mm	L mm	g	g	g
401408M	RB8.0		23.5	13.5	35	54	10	200
401409M	RB9.5	3/8	23.5	13.5	35	58	10	200
401410M	RB10.0		23.5	13.5	35	57	10	200
401411M	RB10.5		23.5	13.5	35	58	10	200
401412M	RB12.0		23.5	13.5	35	62	10	200
401413M	RB12.7	1/2	23.5	13.5	35	64	10	200
401414M	RB13.5		23.5	13.5	35	67	10	200
401419M	RB19.0		25.0	15.5	40	108	10	160