






Composite Impact Wrench

33671 / 33672

33871 / 33872

33861 / 33862

- Lightweight durable composite housing
- Nickel chrome molybenum square drive
- Comfortable rubber handle

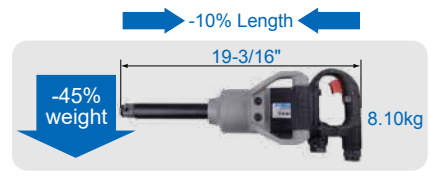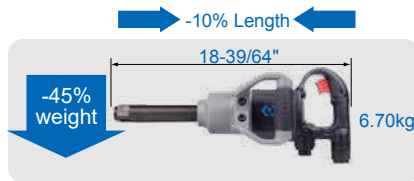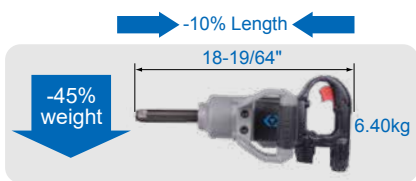

KT NO.	Square drive inch mm	Type Std/Long anvil	Std. bolt size inch mm	Free speed R.P.M	Max. torque ft·lb N·m	Overall length inch mm	Air inlet inch	Air hose ID	Air pressure bar psi	Avg. air consumption L/min CFM	Sound DBA	Vib M/S2	Net weight kgs lbs	
33671-160	3/4" 19.05	Std. anvil	1-3/16" M30	5500	1600 2170	12-1/2" 318	1/2" BSPT / NPT	3/4"	6.2 90	241 8.5	105.00	15.40	5.70 12.57	1 / 2
33672-160	3/4" 19.05	Long anvil	1-3/16" M30	5500	1600 2170	18-19/64" 465	1/2" BSPT / NPT	3/4"	6.2 90	241 8.5	106.00	13.80	6.40 14.11	1 / 2
33871-160	1" 25.40	Std. anvil	1-3/16" M30	5500	1600 2170	12-45/64" 323	1/2" BSPT / NPT	3/4"	6.2 90	241 8.5	106.00	13.70	5.80 12.79	1 / 2
33872-160	1" 25.40	Long anvil	1-3/16" M30	5500	1600 2170	18-39/64" 473	1/2" BSPT / NPT	3/4"	6.2 90	241 8.5	104.00	14.98	6.70 14.77	1 / 2
33861-200	1" 25.40	Std. anvil	1-27/64" M36	5000	2000 2712	13-43/64" 347	1/2" BSPT / NPT	3/4"	6.2 90	255 9.0	106.00	17.20	7.40 16.31	1 / 2
33862-200	1" 25.40	Long anvil	1-27/64" M36	5000	2000 2712	19-3/16" 487	1/2" BSPT / NPT	3/4"	6.2 90	255 9.0	104.00	14.50	8.10 17.86	1 / 2