




6235M



3/4" DR. 6 Point Metric Deep Socket

- 6 pt. hexagon socket
- Chrome vanadium alloy steel, polished, chrome plated
- 4 ball retaining grooves
- DIN 3124, ISO2725-1

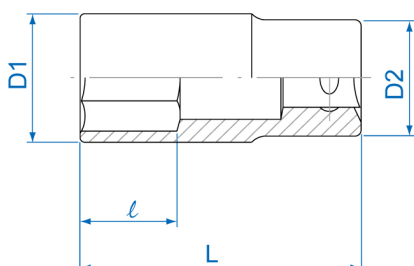

Item	mm	D1 mm	D2 mm	l mm	L (mm)	g	
623517M	17	26.0	32.7	20	90	275	2 / 48
623518M	18	28.0	32.7	20	90	345	2 / 48
623519M	19	30.0	32.7	20	90	325	2 / 48
623520M	20	31.0	32.7	22	90	373	2 / 48
623521M	21	32.0	32.7	22	90	335	2 / 48
623522M	22	33.0	35.7	22	90	391	2 / 48

Item	 mm	D1 mm	D2 mm	ℓ mm	L (mm)		
623523M	23	34.0	35.7	24	90	390	2 / 48
623524M	24	35.0	35.7	24	90	406	2 / 48
623525M	25	35.0	35.7	25	90	399	2 / 48
623526M	26	35.7	35.0	25	90	353	1 / 24
623527M	27	38.0	36.0	28	90	389	1 / 24
623528M	28	39.0	36.0	28	90	397	1 / 24
623529M	29	40.0	38.0	28	90	428	1 / 24
623530M	30	42.0	38.0	31	90	469	1 / 24
623531M	31	43.0	38.0	34	90	472	1 / 24
623532M	32	44.0	38.0	34	90	490	1 / 24
623533M	33	46.0	39.0	34	90	549	1 / 24
623534M	34	47.0	42.0	34	90	591	1 / 24
623535M	35	48.0	42.0	37	90	583	1 / 24
623536M	36	50.0	42.0	37	90	632	1 / 24
623537M	37	51.0	45.0	37	90	687	1 / 24
623538M	38	52.0	45.0	41	90	673	1 / 24
623539M	39	53.0	45.0	41	90	689	1 / 24
623540M	40	54.0	45.0	41	90	713	1 / 24
623541M	41	56.0	45.0	41	90	753	1 / 24
623542M	42	57.0	45.0	46	95	794	1 / 24
623543M	43	58.0	45.0	46	95	816	1 / 10

Item	 mm	D1 mm	D2 mm	 mm	L (mm)		
623544M	44	60.0	48.0	46	95	920	1 / 10
623545M	45	61.0	48.0	46	95	932	1 / 10
623546M	46	62.0	48.0	46	95	940	1 / 10
623547M	47	63.0	48.0	46	95	961	1 / 10
623548M	48	64.0	48.0	50	95	948	1 / 10
623549M	49	66.0	48.0	50	95	1015	1 / 10
623550M	50	68.0	48.0	50	95	1064	1 / 10
623551M	51	69.0	50.0	50	95	1114	1 / 10
623552M	52	69.0	50.0	50	95	1109	1 / 10
623553M	53	70.0	50.0	50	95	1119	1 / 10
623554M	54	72.0	50.0	50	95	1170	1 / 10
623555M	55	74.0	50.0	50	95	1236	1 / 10
623556M	56	75.0	50.0	50	95	1272	1 / 10
623557M	57	76.0	50.0	52	100	1392	1 / 10
623558M	58	78.0	50.0	52	100	1446	1 / 10
623559M	59	78.0	50.0	52	100	1410	1 / 10
623560M	60	80.0	50.0	53	100	1471	1 / 10
623563M	63	83.0	55.0	53	100	1511	1 / 12
623565M	65	85.0	58.0	55	100	1613	1 / 12
623570M	70	92.0	58.0	55	100	1766	1 / 12