



Mini Impact Wrench

33431

- Mini design, overall length 109mm with 1.35kg
- Nickel chrome molybdenum square drive
- Improved jumbo hammer design : 30% higher torque
- One hand operation



33431

- 360 rotation air inlet connector design



Jumbo Hammer

-15% length



-10% weight



- One-hand control forward & reverse switch



- Convenient to switch on both sides




- Ergonomic design interchangeable rubber grip



- Air exhaust away from the operator



- 3-speed regulator for precise control

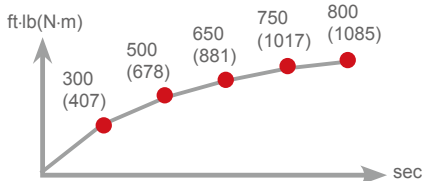

KT NO.	Square drive		Type Std/Long anvil	Std. bolt size		Free speed R.P.M	Max. torque		Overall length		Air inlet	Air hose ID	Air pressure		Avg. air consumption		Sound DBA	Vib M/S2	Net weight		
	inch	mm		inch	mm		ft-lb	N-m	inch	mm			bar	psi	L/min	CFM			kgs	lbs	
33431-050	1/2"	12.70	Std.anvil	5/8"	M16	9000	500	678	4-19/64"	109	1/4"BSPT	3/8"	6.2	90	142	5.0	101.02	8.70	1.35	2.98	1 / 12
33431-051	1/2"	12.70	Std.anvil	5/8"	M16	9000	500	678	4-19/64"	109	1/4"NPT	3/8"	6.2	90	142	5.0	101.02	8.70	1.35	2.98	1 / 12

Impact Wrench

33421

- Nickel chrome molybdenum square drive
- Variable speed trigger
- Muffled on front exhaust



Front exhaust

1/2"

33421



Twin Hammer

KT NO.	Square drive		Type Std/Long anvil	Std. bolt size		Free speed R.P.M	Max. torque		Overall length		Air inlet	Air hose ID	Air pressure		Avg. air consumption		Sound DBA	Vib M/S2	Net weight		
	inch	mm		inch	mm		ft-lb	N-m	inch	mm			bar	psi	L/min	CFM			kgs	lbs	
33421-040	1/2"	12.70	Std.anvil	5/8"	M16	8000	500	678	6-3/4"	171	1/4"BSPT	3/8"	6.2	90	113	4.0	101.02	8.70	2.56	5.64	1 / 8
33421-041	1/2"	12.70	Std.anvil	5/8"	M16	8000	500	678	6-3/4"	171	1/4"NPT	3/8"	6.2	90	113	4.0	101.02	8.70	2.56	5.64	1 / 8